


REV. REVISIONS		DRAW DATE	
REV.	ECN NO.	DESCRIPTION	

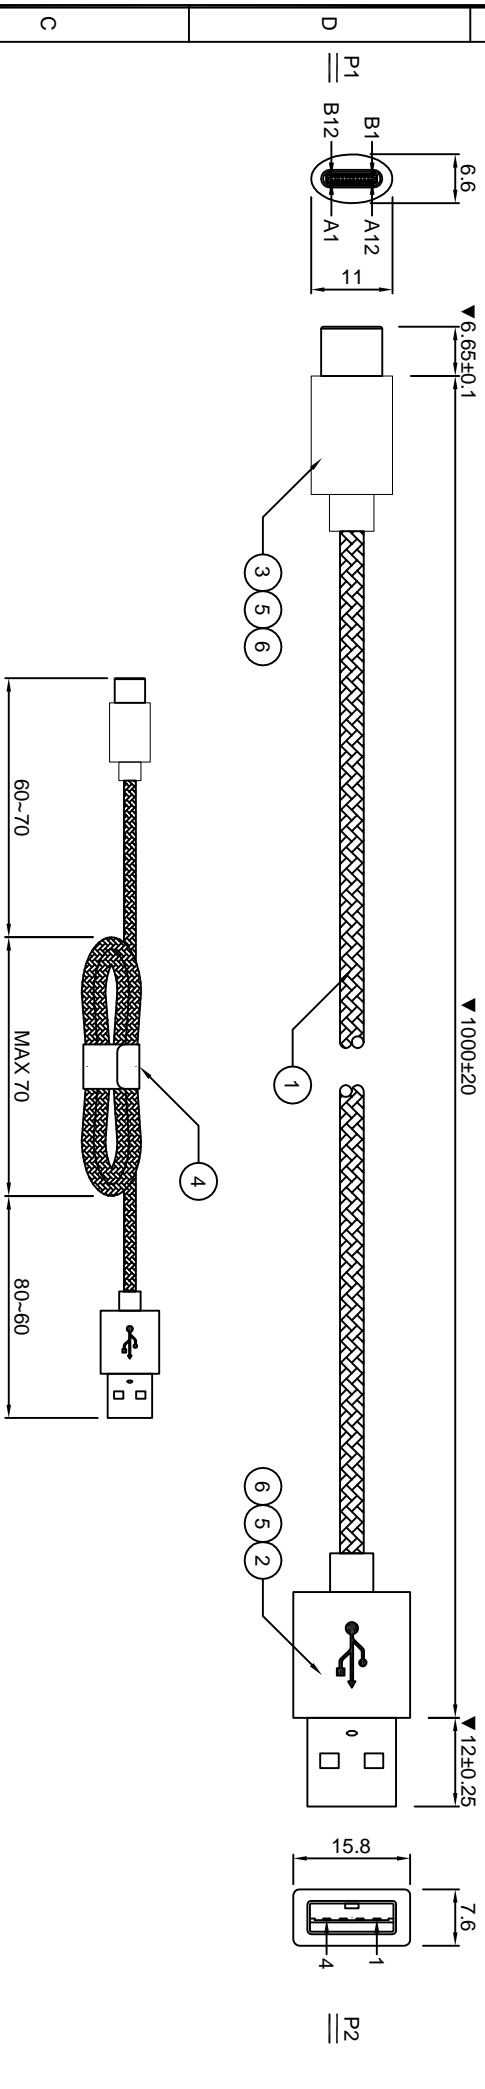

SHELL	SHIELD	SHELL
A6	D+	GREEN
A7	D-	WHITE
A1,B1,A12,B12	GND	BLACK
A5	CC	NC
A4,B4,A9,B9	VBUS	RED
P1	SIGNAL	COLOR P2

NOTE: Rp=56kOhm

ITEM	PART NO.	NAME	DESCRIPTION	QTY	UNIT
6	OTH-000000174	Plastic raw materials	Plastic material PE material, low density/transparent/LDPE wire Inner mold/REACH/ROHS2_0/SCOP17P	0.004	kg
5	OTH-000000165	Plastic raw materials	Plastic material 45P PVC material, black/ROHS2_0-California 65	0.008	kg
4	OTH-CA0010132	Velcro ties	Velcro ties black, size: 12.5 * 1.2cm, material according to the business to provide samples to do goods	1	PCS
3	ETS-D24100831	USB-C terminal	USB 3.1 Type-C Male Black Half Gold 30U Plywood Riveted Steel Case (56K Resistor + 10NF Capacitor)	1	PCS
2	ETS-D04171201	USB A M shell	USB A M short body solder wire type/white rubber core 4PIN/20.4*42.0*4.5mm, plating 3U/for data cable	1	PCS
1	EMD-432099013	Data cable wire	Cable: (40/0.08TC+250D)*(C+(11/0.08TC+250D)*2C+H/2 0/0.08TC +10/0.08TC)+AL+H(16*7/0.06TC) Black TPE outer is black bright yarn outer braided data line 0P=3.2MM cut line size 1040MM/plus or minus 5MM	1	PCS

Customer NO: 6015	Customer P/N: NA	DRAW: 2019.11.05	DWG NO: FCA1799/FCA1796
Customer P/N: NA	PART NO: FCA1799/FCA1796	CHKD: 2019.11.05	TITLE: USB AM To Micro Cable
APPD: Andy 2019.11.05			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MSH ELECTRONIC AND SHALL NOT BE REPRODUCED, COPIED OR QUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MSH ELECTRONIC

X.±1	X°
X.±0.3	X°
.XX±0.20	XX°
.XXX±0.100	.XXX°
UNITS:	mm

SCALE	SHEET	REV.
1:1	1/1	A0