



Bullets


- Cable and converter in one: complete solution for connecting your USB-C device to an HDMI input device (TV/beamer/monitor)
- Maximum resolution 4096 x 2160 (4K) @ 60Hz
- Input: USB-C male - output: HDMI male
- Plug and play: a USB-C port with DisplayPort Alternate Mode (DP Alt Mode) is needed
- Solid aluminium design

Tech specs

| | |
|------------------------|--|
| USB Type-C | : Yes |
| Cable part length | : 1.8 m |
| Shielding type | : Aluminum Mylar |
| Conductor material | : Tinned copper |
| Wire gauge | : 32 AWG |
| Colour | : Grey |
| Connections | : USB, HDMI |
| Connections (computer) | : USB C male (x1) |
| Connections (display) | : HDMI A (full-size) male (x1) |
| Max. resolution @ 60Hz | : 4096 x 2160 |
| 4K compatible | : Yes |
| Video signal | : HDMI |
| Video specification | : HDMI 2.0 |
| Video support | : HDCP |
| USB compatibility | : USB 3.2 Gen 1 - SuperSpeed (USB 3.0) |
| Data transfer rate | : 5 Gbps |
| Chipset | : VL100+PS176 |
| System requirements | : USB Alternate mode |
| Power supply | : Bus powered |

Story

The AC7015 helps you to connect a source device, e.g. a notebook, with a USB-C output, directly to a monitor or beamer with HDMI input. No additional HDMI cable needed. This solid aluminium video/audio converter supports a maximum resolution of 4096 x 2160 (4K) @ 60Hz. An ideal resolution for displaying videos, pictures, presentations etc. Please make sure the USB-C port of your source device supports DP Alt Mode. The long cable of 1.8m gives you more freedom of movement.

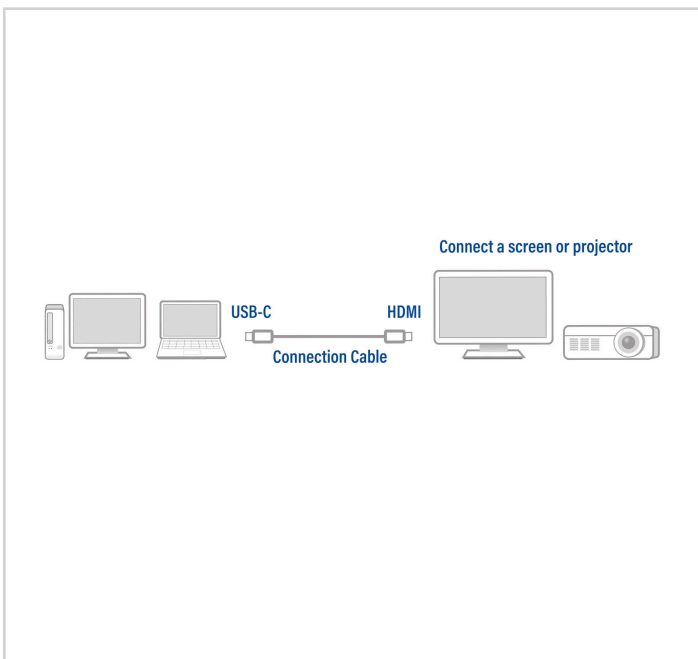

| SKU | EAN | SHORT PRINT DESCRIPTION |
|--------|---------------|--|
| AC7015 | 8716065395501 | USB-C to HDMI male connection cable 1.8m |