
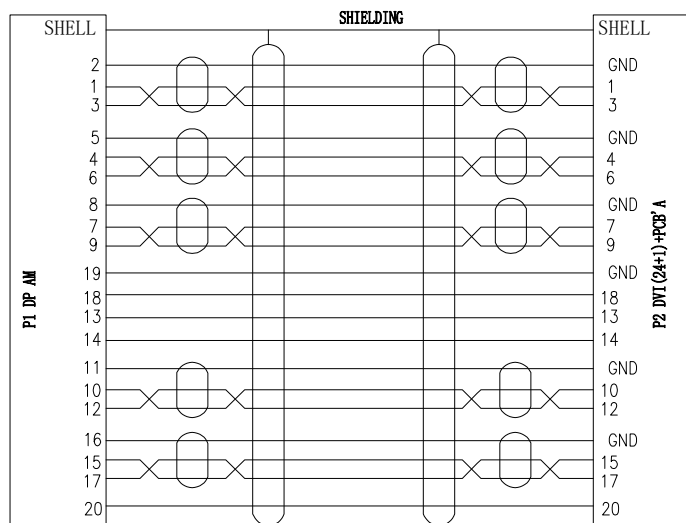


**ELECTRICAL TEST:**


- 1.100% OPEN SHORT MIS WIRE TEST
- 2.CONTACT RESISTANCE:3 OHM MAX
- 3.INSULATION RESISTANCE:5M OHM MIN
- 4.HI-POT TEST:DC 300V/10ms
- 5.PASS 1920\*1080p@60HZ/ TEST

CONSUMER ITEM	LENGTH(mm)
AC7505	1800±30

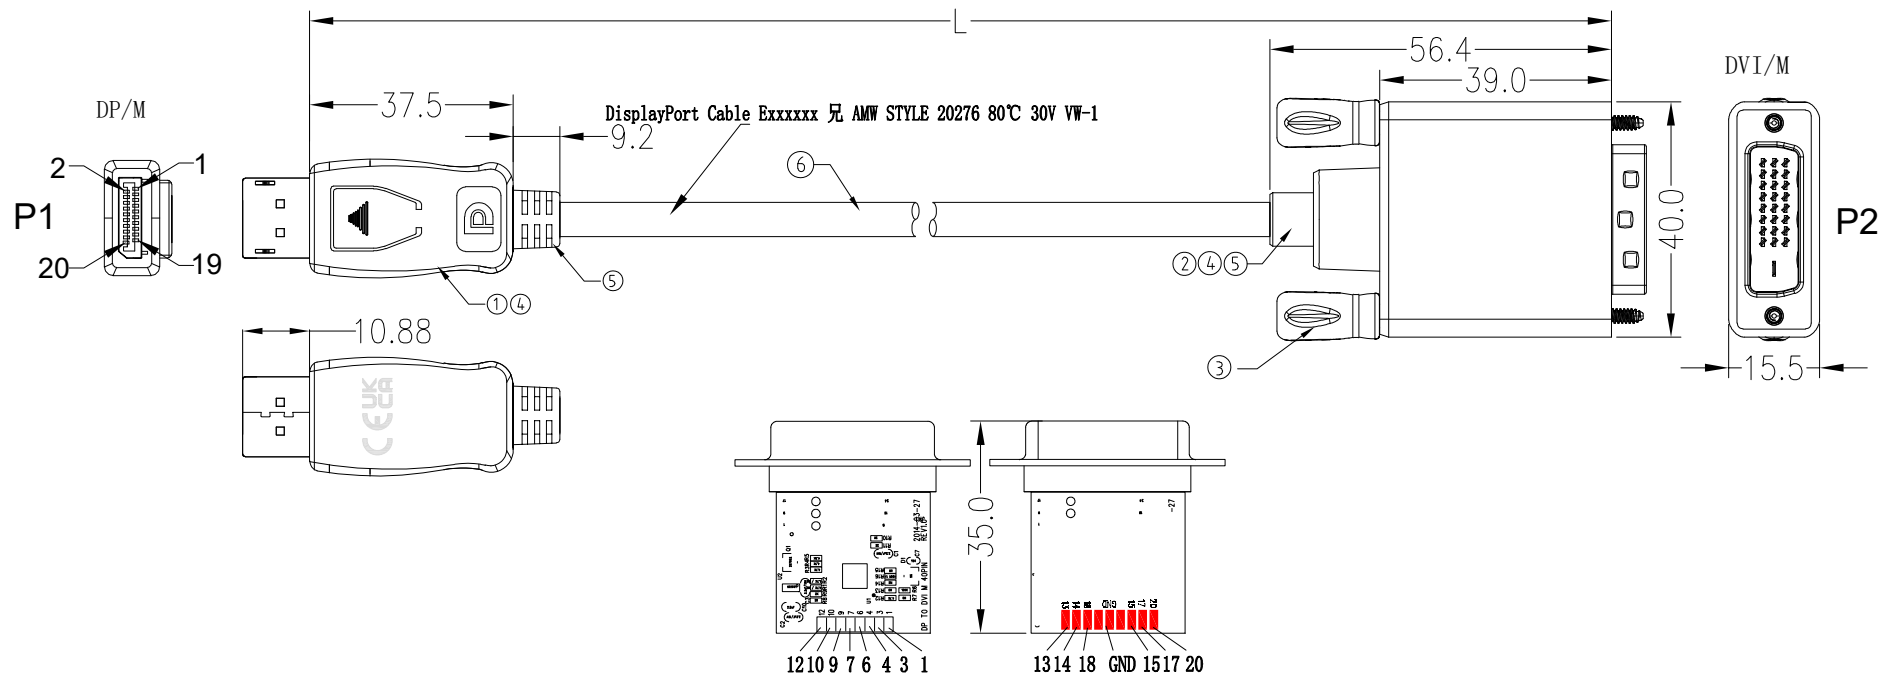

LOGO  
  
 Silk: Pantone Cool Gray 11C  
 11mm\*4.2mm

⑥	Cable	UL20276 #32*5P+#32*5C+AEB JACKET:BLACK PVC OD:5.0	M
⑤	outer molding	BLACK PVC 45P	20g
④	inner molding	LDPE,NATURAL COLOR	10g
③	SCREW	SCREW LENGTH4*60mm (DVI)NICKEL PLATED STEEL BLACK PVC MOLDING	1PCS
②	SHELL	DVI-D(24+1)/M, PIN G/F,BLACK PVC CORE,SHELL G/F,PCB'A(PS8121E)	1PCS
①	Connector	DP/M,PIN G/F,BLACK PVC CORE,SHELL G/F,BLACK SHELL	1PCS
NO.	PART NAME	DESCRIPTION	UNIT

				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT	UNITS: MM	1RD ANGLE
				MODEL NO.		△			
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO.		△			
				FINISHING		△			
				MATERIAL		SYM	DATE	REVISION	