


DB15M(NICKEL PLATED)


DB15F(NICKEL PLATED)

BLACK MOLDING

BLACK MOLDING

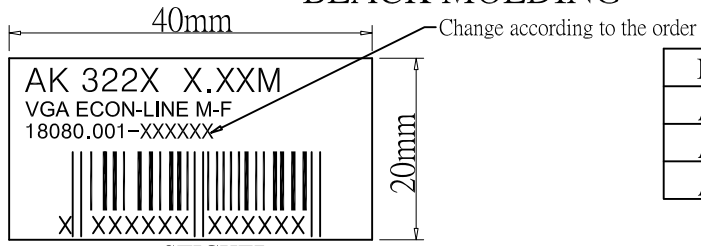

ITEM NO.	Length	Tolerance	Sticker
AK3221	1800mm	30mm	8716065260397
AK3222	3000mm	50mm	8716065260403
AK3223	5000mm	50mm	8716065260410

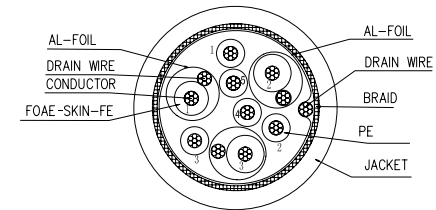


NOTE:

1. CABLE:NON-UL 30AWG(1C+D+AL)*3C+5C+AEB OD=5.8mm BLACK COLOR PVC JACKET.
2. LENGTH: L
3. CONNECTORS: HDB15M*1PCS HDB15F*1PCS(BLUE INSULATOR)
4. MOLD: BLACK MOLDING.
5. SCREW:UNC#4-40*4
6. CONTACTS:

HDB15M	1	2	3	5	4+6+7+8+10+11+G	12	13	14	15
HDB15F	1	2	3	5	4+6+7+8+10+11+G	12	13	14	15
	RED	GRE	BLU		BRAID+DRAIN				

7. OPEN/SHORT TEST: 100% TEST.
INSULATION: 1M.

RoHS COMPLIANT

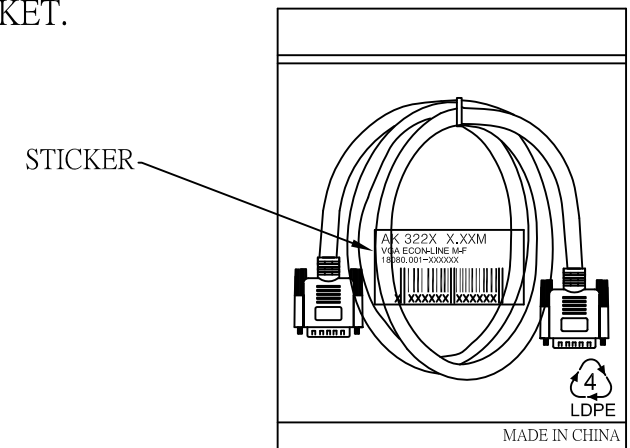

1PCS/PE BAG(0.06*190*300mm)+Sticker

Company	I.B.V	Goods Code		Draw		Date	2011.08.15
ITEM NO.	AK322X M-F	Drawing Evidence:		Check		Date	
Goods NO.				Approval		Date	
Original NO.	S_*****	Unit(mm)					

ewent
by eminent

D		
C		
B	Added Barcode	2011.10.05 chi
VER. A	REVISE	Date