
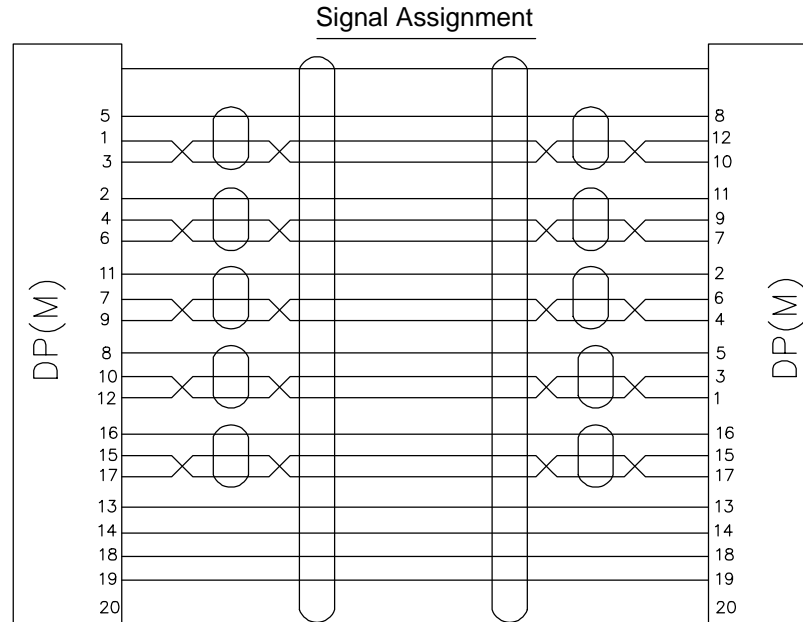


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2017/10/27	

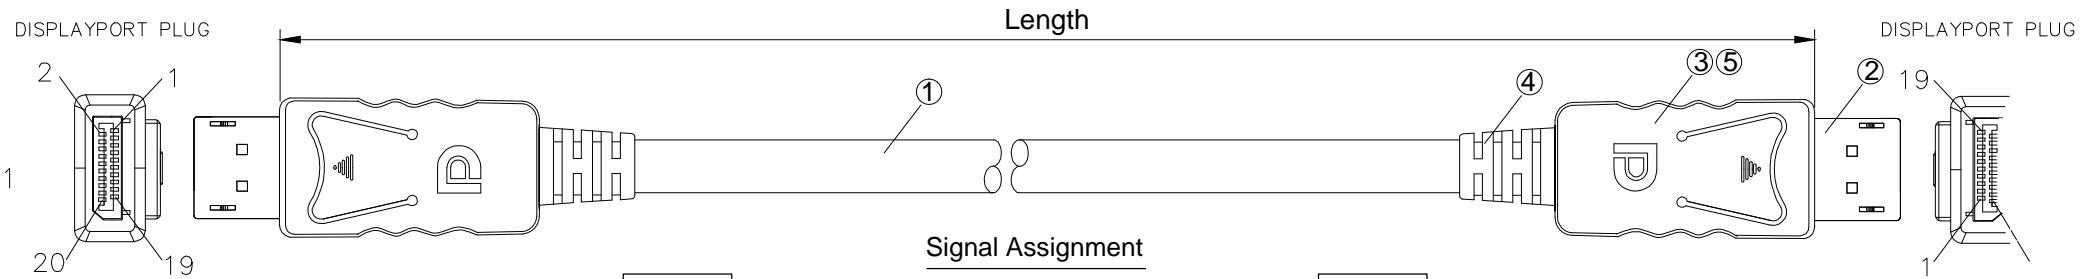


Remark:

1. 100% Open/Short Test
2. Conductive Resistance:5ohms MAX
3. Insulation Resistance:10M ohm MIN.
4. HI-POT:DC 300V/10MS.
5. The product is RoHS compliant.
6. Support 4K*2K@60Hz

Item NO.	Length(m)
AK3984	3.0m
AK3986	5.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	Shell ABS, DP(M) Shell	2Sets	
④	SR 60P PVC, Black	2PCS	
③	Internal Mold Inner Mould PE	2PCS	
②	Connector DP PLUG PIN, Gold-Plated	2PCS	
①	Cable (1Px28AWG +D+AL)x5p+5Cx28AWG+ML+AL+D +B; OD7.2mm PVC,Black		



ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION Dp to Dp Cable		PAGE NO	1/1
		DATE	2017/10/27
APPROVAL	CHECKED	DRAWN	