

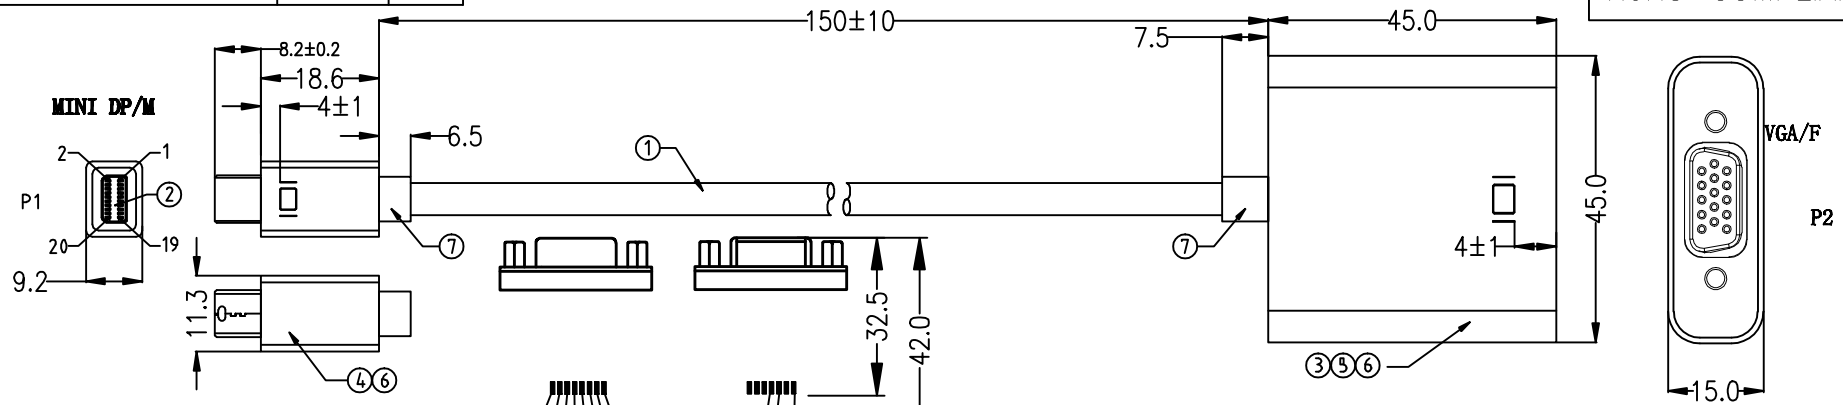
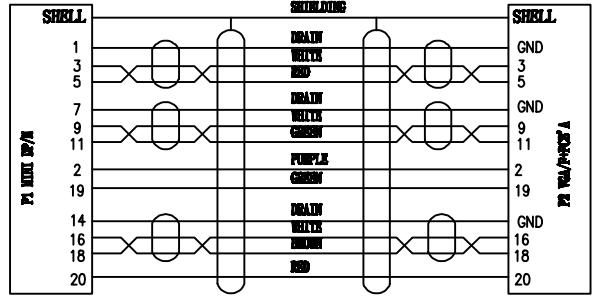
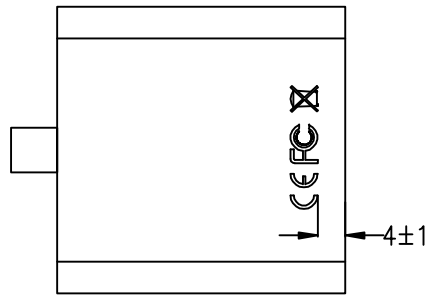



RoHS-COMPLIANT



- ELECTRICAL TEST:**
1. 100% OPEN SHORT MIS WIRE TEST
 2. CONTACT RESISTANCE: 3 OHM MAX
 3. INSULATION RESISTANCE: 10M OHM MIN
 4. HI-POT TEST: DC 300V/10ms
 5. Displayport version: 1.1v
 6. Max Resolution: 1920*1080P

Assembly drawing :



7	MOLD	White 45P PVC	A/R
6	MOLD	LDPE, Natural color	A/R
5	SHELL	VGA/F white pvc front cover shell	1
		VGA/F white pvc shell	1
4	SHELL	MINI DP/M white pvc front cover shell	1
		MINI DP/M white pvc shell	1
3	PLUG	VGA/F:PIN G/F, Blue pvc core, Nickel shell+PCB'A (ANX9833)	1
2	PLUG	MINI DP/M:PIN G/F, white pvc core, Nickel plated steel	1
1	CABLE	UL20276 #32*3P+#32*5C+AEB, White PVC jacket, OD:5.0mm L=390mm	1
NO.	NAME	SPEC	Q'TY

ITEM: AK4002		Tol. Inch mm		UNIT	mm	DRAWING: HUANG	
MINI DP M TO VGA F		X.	.02	0.5	ANGLE	±'	CHECK 1:
		X.X	.12	0.3	SCALE	NONE	CHECK 2:
		X.XX	.008	0.2	FONT	NONE	CHECK 3:
C.T	C.T ITEM	X.XXX	.006	0.15	The third perspective	DATE	2015-09-23
		X.XXX	.006	0.15		VER.	A PAGE 1/1

