
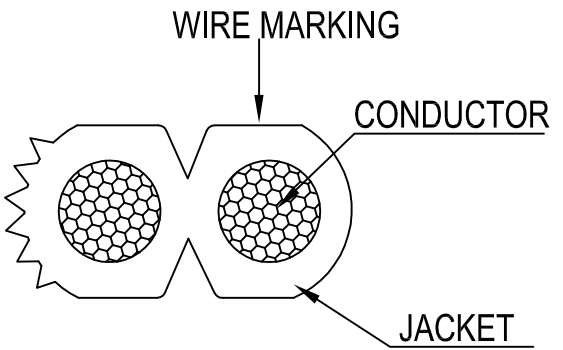

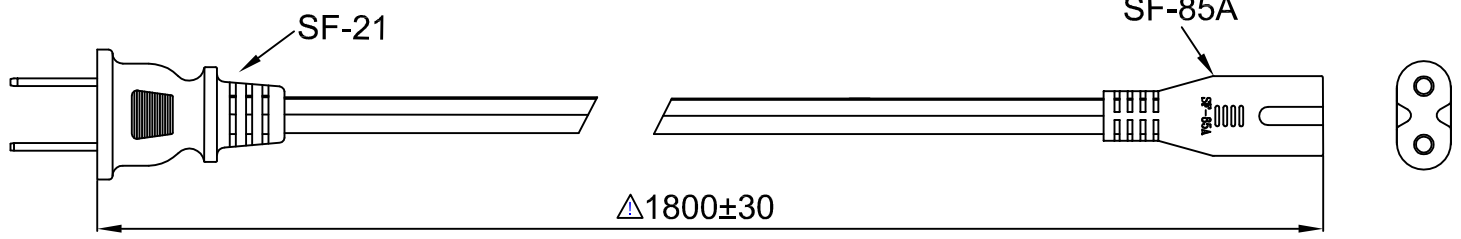


1	2
CUSTOMER NAME	
CUSTOMER Part No.	AK5074

7	8	9	10
DATE	REV	DESCRIPTION	BY
2015.6.1	A/0	NEW	Maxwell Yuan



REMARKS:

- 1.POLARIZATION AND CONTINUITY TEST
- 2.DVW TEST:1500VAC,1S
- 3.PLUG(SF-21) RATED POWER:125V 10A
- 4.CONNECTOR(SF-85A) RATED POWER:125V 10A
- 5.WIRE: SPT-2 2X18AWG RATED VOLTAGE: 300V
- 6.COLOR:BLACK
7. COMPLY WITH UL817 STANDARD

WIRE MARKING: (Hollow) NO.6		(UL) E135710-F3 SPT-2 2X18AWG 60°C 300V VW-1 CSA LL95737 SPT-2 2X0.824mm <sup>2</sup> (18AWG) 60°C 300V FT2	
Key Size	△	3RD	
Length (mm)	Tolerance		
	Critical	Normal	General
0-15	±0.05	±0.10	±1.0
15-60	±0.10	±0.20	
60-150	±0.15	±0.35	±1.5
150-350	±0.20	±0.50	
350-1000	±0.40	±0.65	±2.0
Part No.		AK5074	
Description		SF-21+SF-85A SPT-2 18/2C 60°C BK	
UNIT	mm	APPROVAL	CHECKER
PAGE	1/1		DRAWER
Draw.No.			

