
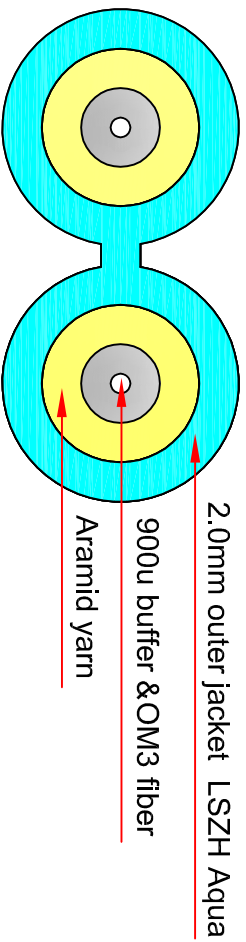


L - -L+200mm

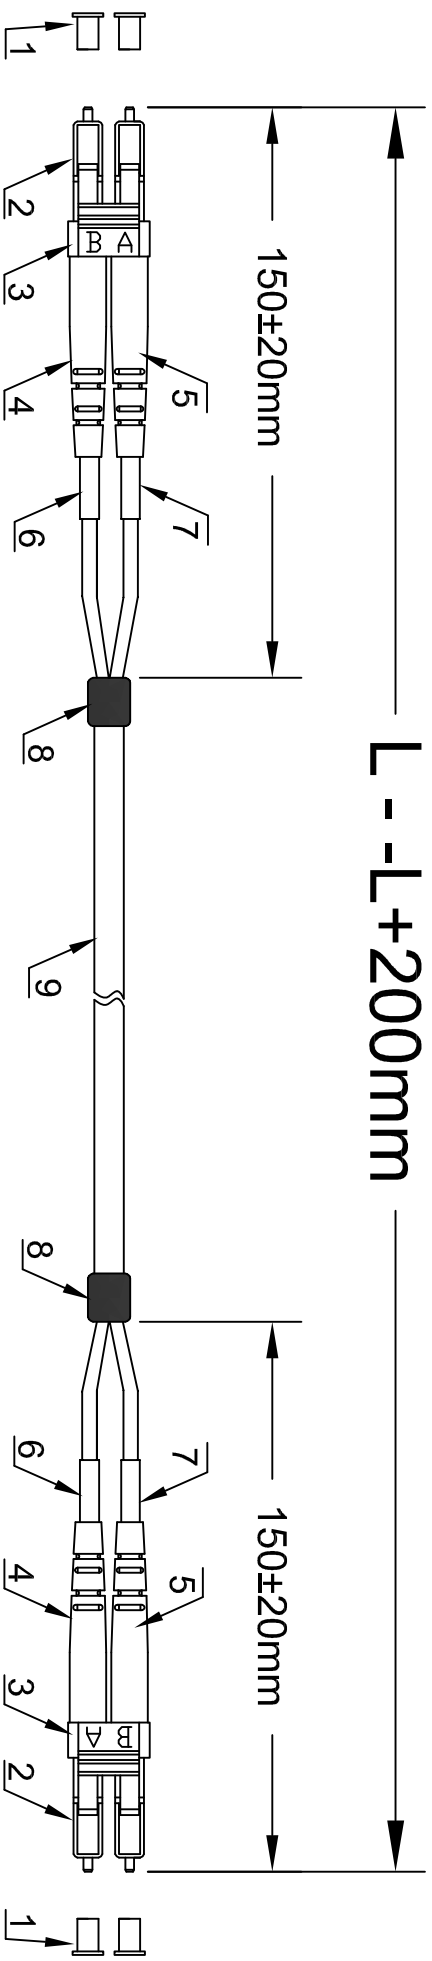

ASSEMBLY	CONNECTIVITY
LC/UPC-1	LC/UPC-2
A	B
B	A

ITEM NO	LENGTH
EL9601	1.00m
EL9602	2.00m
EL9603	3.00m
EL9605	5.00m
EL9610	10.00m

- NOTE:
1. Insertion loss : LC/PC < 0.25dB    λ: 850&1310nm  
Return loss : LC/PC >= 30dB    λ: 850&1310nm
  2. Durability: 500 matings
  3. Operation temperature: -40°C to +85°C
  4. LC connector according to IEC 61754-20

ROHS  
Complaint

LC/PC --- LC/PC DX 2.0mm OM3 LSZH Aqua

ITEM	Description	Q'TY
1	LC dust cover white	4 PCS
2	LC/PC MM simplex connector beige	4 PCS
3	LC clip beige	2 PCS
4	LC 2.0mm boot white	2 PCS
5	LC 2.0mm boot yellow	2 PCS
6	LC heat-shrink tubing white	2 PCS
7	LC heat-shrink tubing yellow	2 PCS
8	Breakout heat-shrink tubing black L=15mm	2PCS
9	OD=2.0mm MM duplex OM3 50/125um fiber optical cable LSZH Aqua	1 PC

<b>ewent</b> <small>BY INVENT</small>			
Designed by:	Yong Yu	Audit:	Qihua Cheng
Date:	2017-03-14	Approve:	Yong Huang
Unit:	mm	Sheet:	A4
Drawing NO:	SOP-ED-170314-08-V1		