



KPW-300T



1U Rack Mountable 300W Switching Power Supply for PoE/PoE+ applications

Product Highlights:

- Universal AC connector
- PoE+ voltage options
- 19" rack 1U slot mountable
- Industrial temperature rating

Key Features:

- Full range of AC input with IEC320 AC socket for universal installation
- Built-in active PFC function, PF>0.95
- High efficiency up to 89%
- Withstand 300VAC surge input for 5 seconds
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in constant current limiting circuit
- Industrial terminal block connector for DC output
- Wide range of operating temperature -40 ~ 70°C
- Support 19" rack mounting

Applications:

- External power supply for typical PoE & high power PoE+ switches or systems
- General power supply for critical temperature environments
- General power supply for 19" rack-mount systems

Specifications:

AC IN Voltage	100 ~ 264VAC, 50/60Hz
DC Voltage Options	+48VDC, +52VDC, +54VDC
AC IN Connector	IEC320 C14 socket
DC OUT Connector	Terminal block 3P: Vout+ / Vout- / FG
LED Power status	AC in, DC out OK
Protection	Short circuit Over load: 105%~135% Over voltage: 58V~67VDC Over temperature: 95°C (+/-5°C)
Environment	Operating Temperature: -40°C ~ 70°C Storage Temperature: -40°C ~ 85°C Relative Humidity: 10% ~ 95% non-condensing
Power Rating	300W @50°C, 225W @60°C, 150W @70°C
Fan Cooling	Yes
Mounting Support	Desktop, 19" Rack, Enclosure
Dimensions	325 x 210 x 43 mm (WxDxH)
Power Module	UL60950-1, TUV EN60950-1 Certified
MTBF	>176K Hours
Approval	FCC Class B, VCCI Class B, CISPR 22 Class B Certified, CE mark LVD, IEC 60950-1 certified, EN 55022 emission, EN 61000-3-2, 61000-3-3 EN 61000-6-2 immunity for industrial environment




Ordering Information:

Model	DC Out
KPW-300T-48	+48V/6.25A
KPW-300T-52	+52V/5.77A
KPW-300T-54	+54V/5.56A



Application

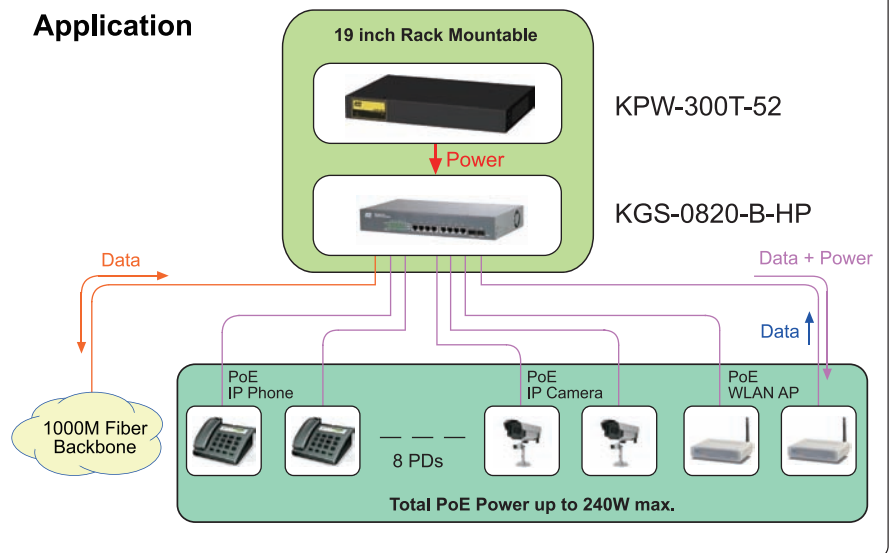

FCC Part 15, Class A
CISPR 22 Class A


Katron Technologies Inc.

15F-7, No. 79, Sec. 1, Hsin Tai Wu Rd.,
Hsi-chih District, New Taipei City, Taiwan
Tel: 886-2-2698-3878
Fax: 886-2-2698-3873
E-mail: kti@ktinet.com.tw
URL: <http://www.ktinet.com.tw>

KTI Networks Inc.

10415-A Westpark Drive, Houston,
TX 77042. U.S.A.
Tel: 1-713-266-3891
Fax: 1-713-914-0555
E-mail: contact@ktinet.com
URL: <http://www.ktinet.com>

Trademarks: All brand names are trademarks or registered trademarks of their respective holders.
This information is subject to change without prior notice.

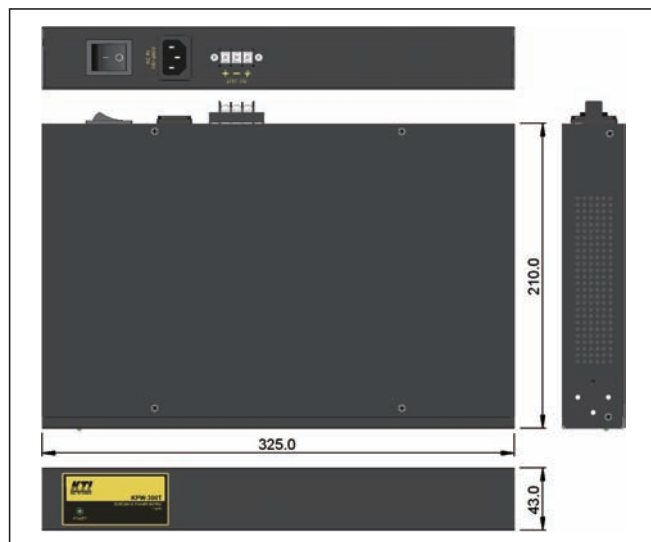

Dimensions