



Pitch (mm)	1,25
Mating contact size	? 0,30
No of contacts	3
Polarising	Yes
Locking	Friction lock
Material contact	Copper alloy
Plating contact	Sn
Material insulator	High temp. thermoplast UL94V-0
Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	300 V _{RMS} for 1 minute
Operating temperature	-25°C to +85°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
A	8,50
B	5,50

Pinheaders for SMD mount in a 1,25 mm pitch with additional solder pads. Compatible with industries standard.

Right angled (parallel).

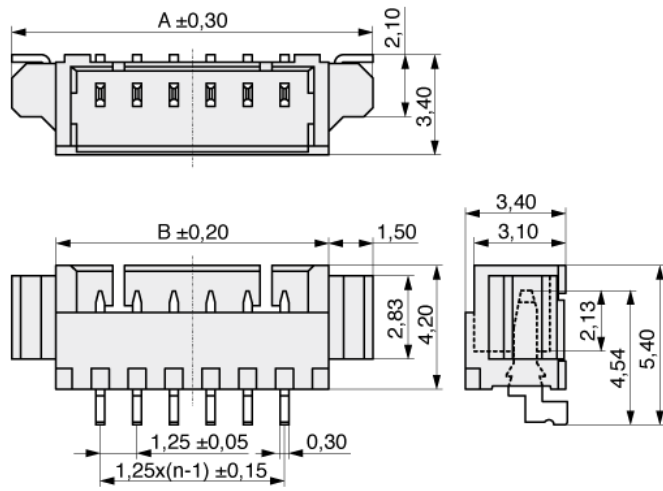

Footprint

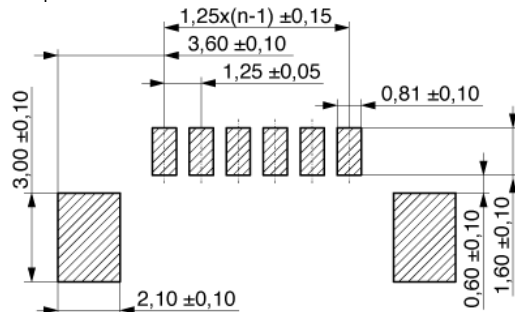

Date: 18.04.2011

Order code: 427-2-003-0-T-KS0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: yk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=427-2-003-0-T-KS0