


<b>BELDEN</b>	<b>TECHNICAL DATA SHEET</b>	code	<b>BE41206</b>
		version	<b>1</b>
	HOOK UP WIRE	date	<b>2006-11-08</b>
	<b>14x0.2B PVC VMDS 70C</b>	page	<b>1/1</b>

**APPLICATION**  
VMDS 70C

**CONSTRUCTION**

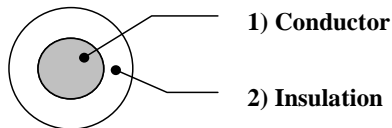

**1. Conductor**

Material Stranded annealed bare copper wire  
Diameter 14x0.2 mm (0.4mm<sup>2</sup>)

**2. Insulation**

Material PVC  
Diameter over insulation 1.85 ± 0.1 mm  
Min. wall thickness minimum 0.35 mm

**REQUIREMENTS AND TEST METHODS**

Conductor resistance maximum (at 20 °C) 45.5 Ω/Km  
Dielectric strength test (IEC189-1) 3000 V dc / 1min.  
Temperature range operating -25C up to 70C



Belden CDT believes this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

© Belden Wire & Cable B.V.

All rights are reserved. Reproduction in whole or in part is prohibited without the written consent of the copyright owner

<b>BELDEN</b>	<b>TECHNICAL DATA SHEET</b>	code	<b>BE41206</b>
		version	<b>1</b>
	HOOK UP WIRE	date	<b>2006-11-08</b>
	<b>14x0.2B PVC VMDS 70C</b>	page	<b>2/1</b>