


PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
SMALL	BAG TYPE	QTY	LABEL
	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL B"



DETAIL B
 y: Year; mm: Month
 xxxxx: Serial Number

ASSEMBLY CONNECTIVITY	
Side:A- LC/UPC	Side:B- ST/UPC
A	B
B	A

RL7501

LC/UPC-ST/UPC duplex patchcord OM2 1M



IIC: 04015001-P0015774

ACT is a registered trademark. All mentioned brand names are registered trademarks of their respective owners. Rights to the registered Names / Logos / Trademarks / Brands / Service Marks featured are property of and belong to their respective owners. Developed and styled in Europe, made in China. Misprints and errors reserved. ACT cannot be held liable or responsible for inaccurately presented content. ACT, Koolhovenstraat 1E, 3772 MT Barneveld, The Netherlands.

We advice to clean all the connector ferrules for optimal performance. You can find safety information at www.act-connectivity.com/safety

www.act-connectivity.com

0 000000 000000

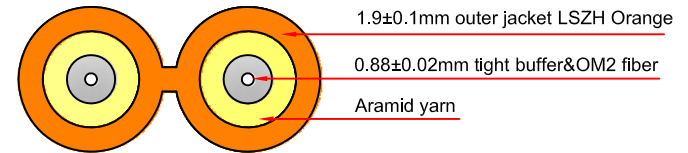

RoHS
Compliant

DETAIL C

DETAIL A

Partnumber	Length	Tolerance	Partnumber	Length	Tolerance
RL7501	1M	0/+100mm	RL7510	10M	0/+100mm
RL7551	1.5M	0/+100mm	RL7515	15M	0/+100mm
RL7502	2M	0/+100mm	RL7520	20M	0/+100mm
RL7503	3M	0/+100mm	RL7530	30M	0/+150mm
RL7505	5M	0/+100mm	RL7550	50M	0/+250mm

LC/UPC --- ST/UPC duplex (1.9±0.1)*(4.0±0.2)mm OM2 LSZH Orange

ITEM	Description	Q'TY
1	LC dust cover white	2 PCS
2	LC/UPC MM duplex connector beige	1 PC
3	LC clip beige	1 PC
4	LC short boot white L=19.5±0.5mm	1 PC
5	LC short boot yellow L=19.5±0.5mm	1 PC
6	LC heat-shrink tube white	1 PC
7	LC heat-shrink tube yellow	1 PC
8	Breakout heat-shrink tube black L=15mm	2 PCS
9	Cable lable	1 PC
10	OD=(1.9±0.1)*(4.0±0.2)mm duplex OM2 fiber optical cable LSZH Orange	1 PC
11	ST boot black	1 PC
12	ST boot red	1 PC
13	ST/UPC MM simplex connector	2 PCS
14	ST dust cover lucency	2 PCS



Designed by:		Audit:	
Date:	2021-06-29	Approve:	
Unit:	mm	Sheet:	A4
Drawing NO:	RL75xx LC/UPC-ST/UPC duplex patchcord OM2-V1		

Product Specification

Standard Compliances

1. ANSI/TIA-568.3-D.
2. ISO 11801 OM1 /IEC60793-2-10 type A1a.
3. Telcordia GR-326-CORE Issue 4 February 2010 Compliance.
4. RoHS Compliance for the Requirement of European Union Issued Directive 2011/6S/EU.

Construction&Characteristics

Optical Performance	Insertion loss typical	0.15dB
	Insertion loss maximum	0.25dB
	Return loss	≥30dB
	Polish	UPC
Connector	Connector A side	IEC61754-20 LC connector
	Connector B side	IEC61754-2 ST connector
	Ferrule	Ceramic Zirconia (ZrO ₂)
Cable	Fiber class	OM2
	Fiber type	Multimode 50/125
	Cable type	(1.9±0.1)*(4.0±0.2)mm LSZH Orange
	Tensile strength	200N (short time 400N)
	Operation temp.	-20 °C to +80 °C (5 cycles)
	Vibration	10 to 55 Hz 15mm double amplitude
Marking	ACT Premium Multimode Fiber Optic Patch cable 50/125µm,OM2,LSZH xxxxM	

100% tested and approved

1. ACT advises to clean every connector ferrule before usage to get optimal performance.
2. Always leave the dust caps on if the cable isn't installed.