


RoHS CompliantU

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2018/08/28	

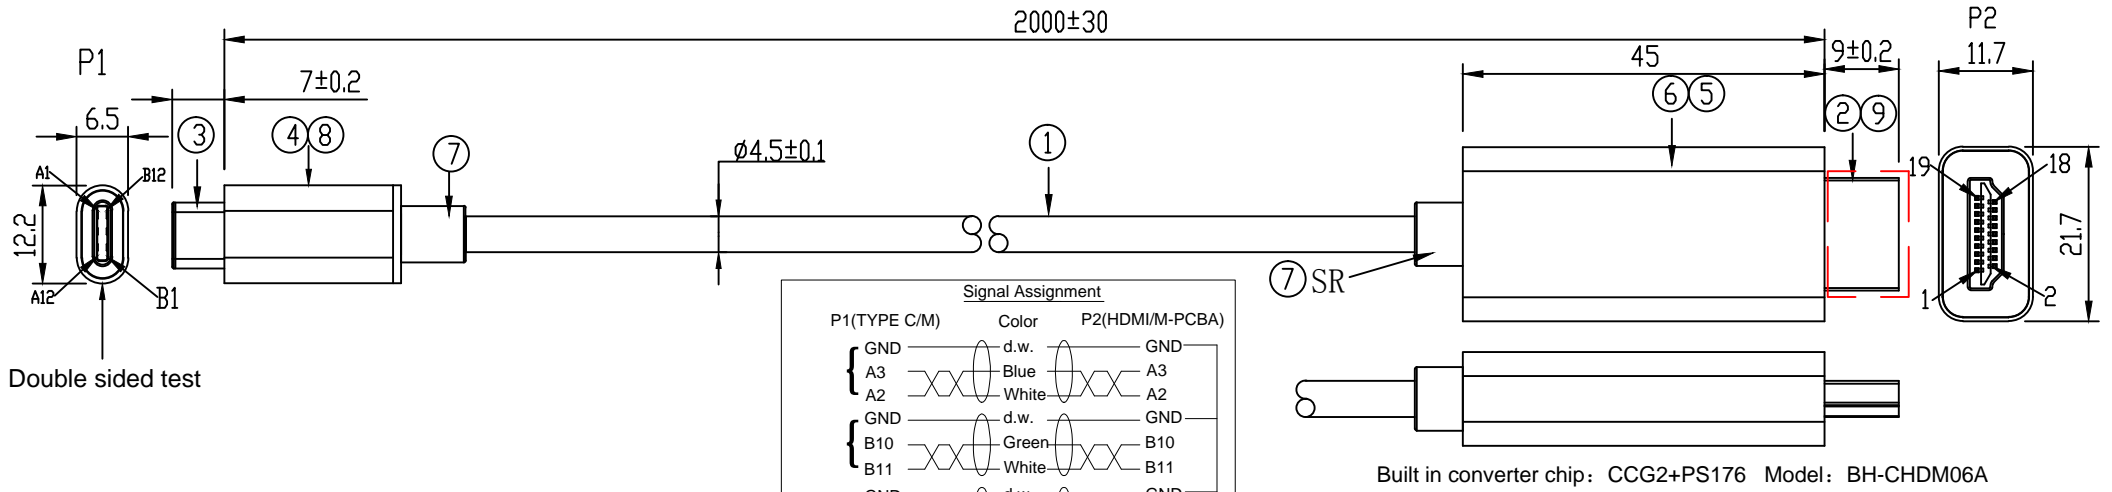

Double sided test

- Remark:
- 100% Open/Short Test
 - Conductive Resistance: 20ohms MAX
 - Insulation Resistance: 10M ohm MIN.
 - HI-POT: DC 300V/10MS.
 - The product is RoHS compliant.
 - Support 3840*2160@60Hz

Signal Assignment		
P1(TYPE C/M)	Color	P2(HDMI/M-PCBA)
GND	d.w.	GND
A3	Blue	A3
A2	White	A2
GND	d.w.	GND
B10	Green	B10
B11	White	B11
GND	d.w.	GND
B3	Red	B3
B2	White	B2
GND	d.w.	GND
A10	Brown	A10
A11	White	A11
A8	Grey	A8
B5	Yellow	B5
A7	Green	A7
A6	White	A6
B8	Purple	B8
A5	Orange	A5
PWR	Red	PWR
Shell	Braiding	Shell

Item No.	Length(m)
SB0030	2.0m

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑨	LID	PE	1PC
⑧	Innernal Mold	PE	
⑦	External Mold	PVC,Black,45P	
⑥	PCBA	PCBA:BH-CHDM06A CHIP:CCG2+PS176	1PC
⑤	Shell	45mm HDMI Shell, Black	1PC
④	Shell	21mm Type C Shell, Black	1PC
③	Connector	Type C 3.1 Male, Gold-Plated	1PC
②	Connector	HDMI Male, Gold-Plated	1PC
①	Cable	(32# AWG*1P+D+AL)*4+32#*1PR+32#*4C+24#*1C +AB 144/0.06TC OD:4.5 mmPVC,Black	

	TOLERANCES UNLESS OTHERWISE STATED
X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:	SB0030	SCALE	NO
DESCRIPTION	Type C to HDMI Male	PAGE NO	1/1
		DATE	2018/08/28
APPROVAL		CHECKED	
		DRAWN	