


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2020/02/13	


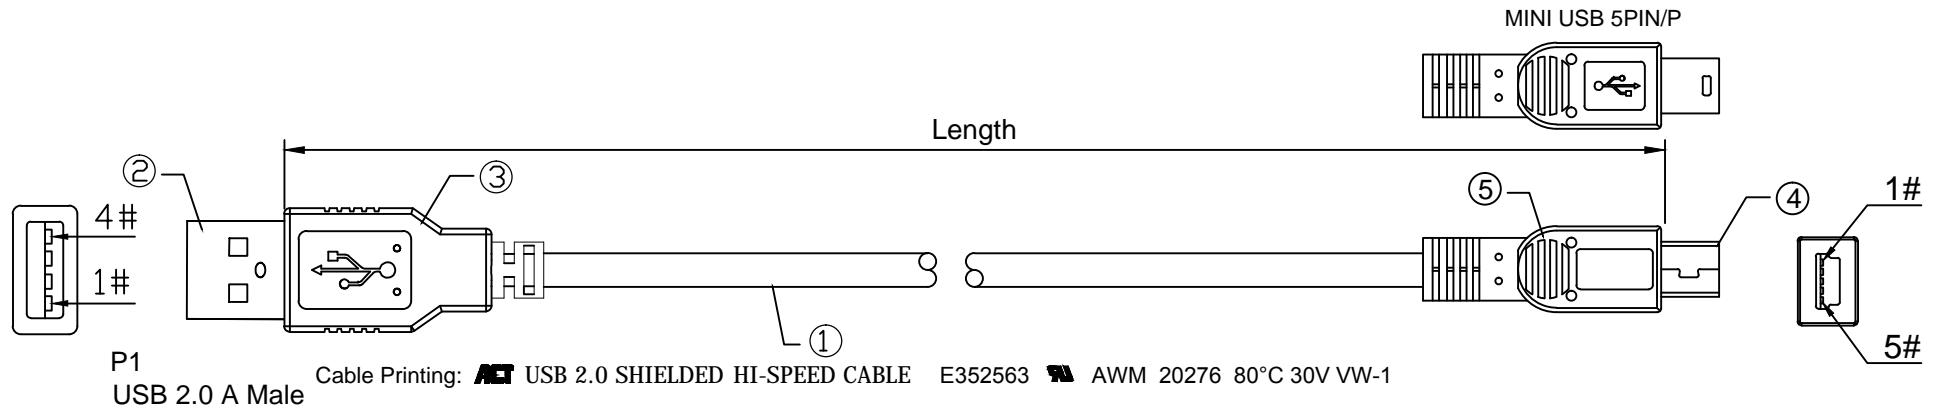


P1
USB 2.0 A Male

Cable Printing: **ACT** USB 2.0 SHIELDED HI-SPEED CABLE E352563 AWM 20276 80°C 30V VW-1

MINI USB 5PIN/P

CONNECTION

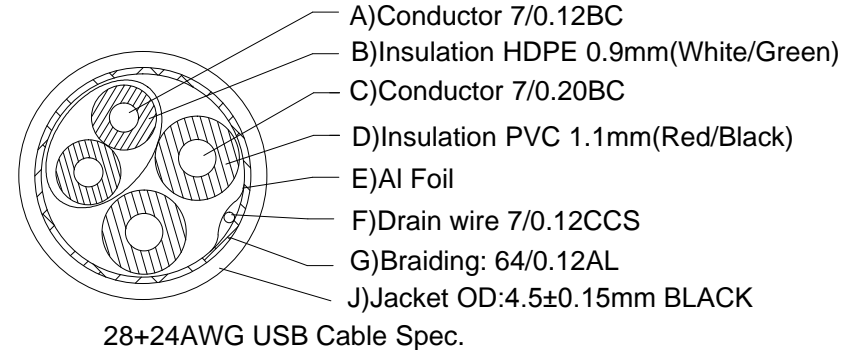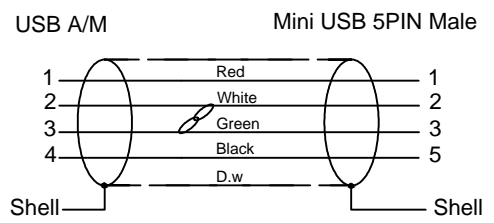

- Remark:
- 100% Open/Short Test
 - Conductive Resistance:2ohms MAX
 - Insulation Resistance:5M ohm MIN.
 - The product is Reach/RoHS compliant.





Item NO.	Length(m)
SB2412	1.8m

⑤	External Mold	Outer Mold 45P PVC, Black	1PC	
④	Connector	Micro USB Male, Nickle-Plated	1PC	
③	External Mold	Outer Mold 45P PVC, Black	1PC	
②	Connector	USB A Male, Nickle-Plated	1PC	
①	Cable	28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC BLACK		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

	TOLERANCES UNLESS OTHERWISE STATED
X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB A Male TO Mini B 5Pin	PAGE NO	1/1
		DATE	2020/02/13
APPROVAL		CHECKED	
		DRAWN	

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/01/27	

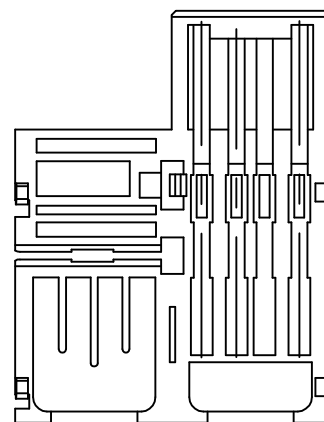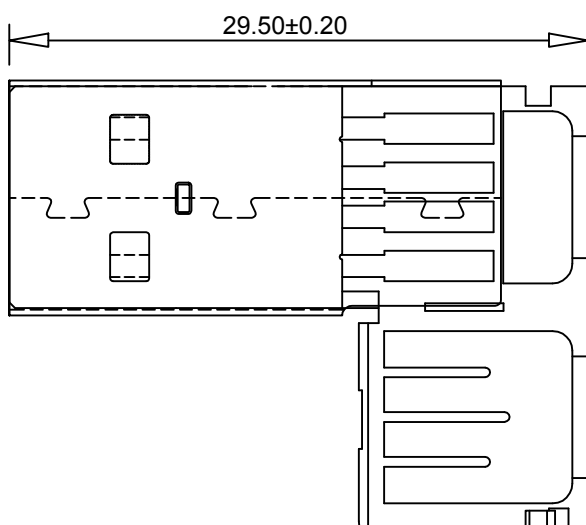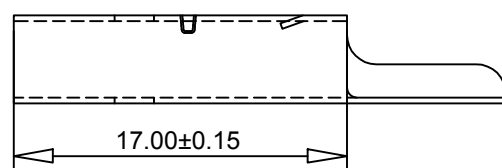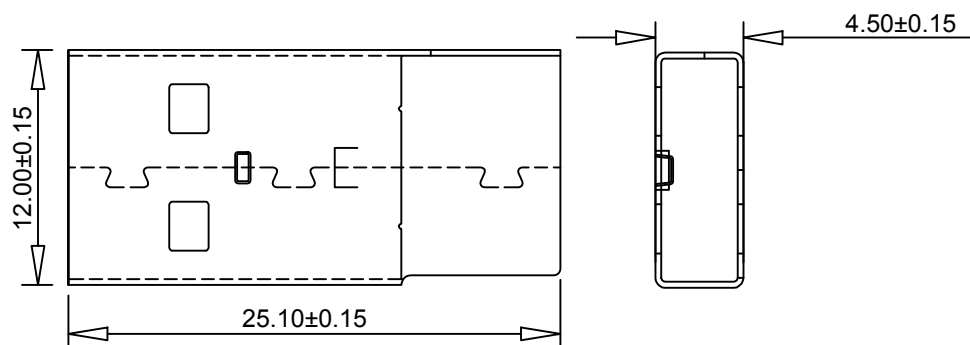

ERP NO.:		SAMPLE DWG NO.:	
ACT No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
		DATE	2021/04/14
APPROVAL		CHECKED	
DRAWN			