



1 2 3 4 5 6

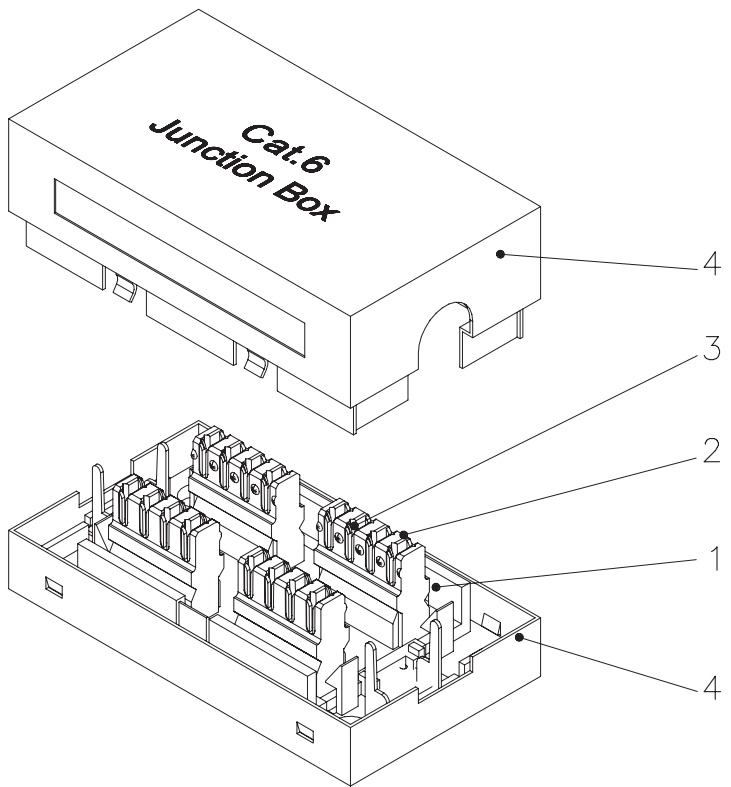

SCALE 1/1

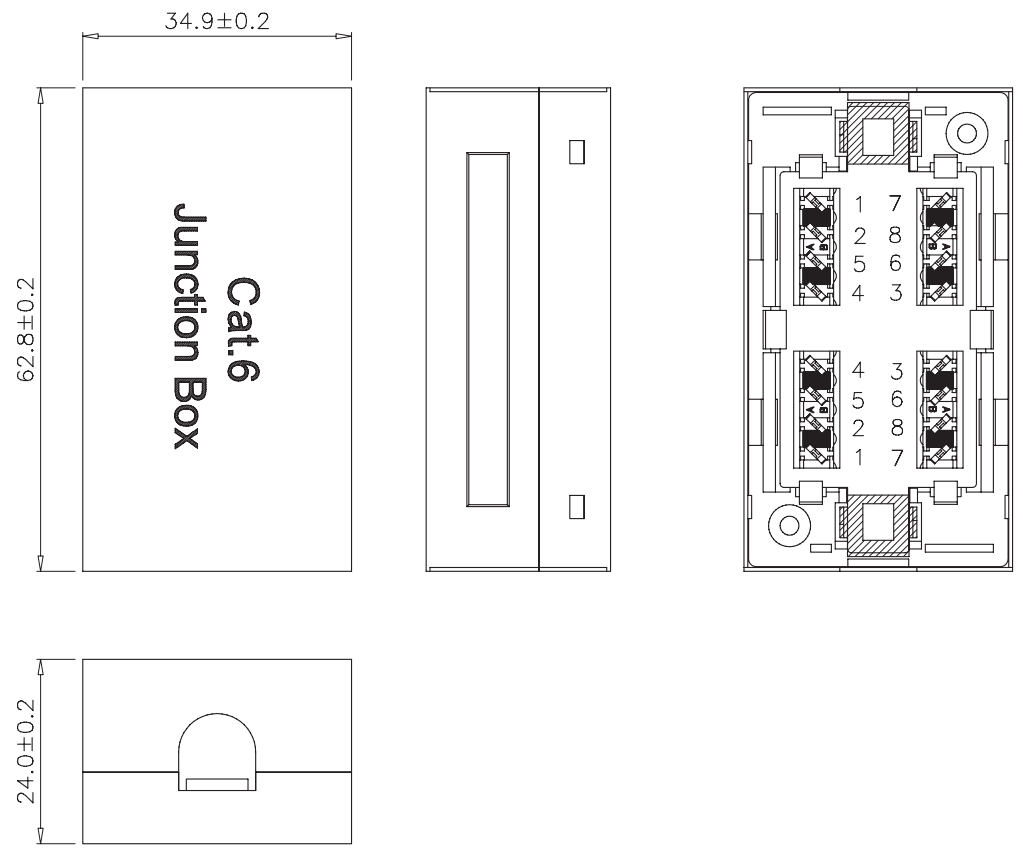

Specification :

Material :

1. Bottom Cover : ABS, UL 94V-0, with white color.
2. IDC :
 - 2-1. Housing : PC+Glass Fiber, UL 94V-2.
 - 2-2. Phosphor Bronze with Tin plated.
3. Metal Cover : SPCC, 0.5 mm thickness with Chromium plated.
4. PCB : FR4, UL 94V-0.

Performance :

- a. T568A & T568B wiring.
- b. Operating temperature : -10°C to 60°C. (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
- c. Durability :
 - *IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools.
- d. The Cat.6 transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.



GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	25.JUN.2010	QIQI	SD6020
	CHECK	25.JUN.2010	JANE	
	APPROVAL	25.JUN.2010	JAIMY	
		DATE	NAME	ITEM NO.:
SCALE	1/1 (A4)	UNIT	mm	DES.: CAT.6 FULL SHIELDED BOX
DRAWING NO.		DRAWING CLASSIFICATION		
DRAWING CLASSIFICATION				
S		SHEET	1 OF 1	A3

1 2 3 4 5 6 10cm