



TRANSITION CONNECTOR PITCH 2.54x2.54mm

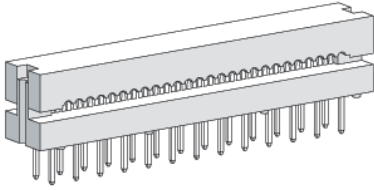

Contacts: Copper alloy
 Finish: tin plated
 Insulator: PBT 20% GF
 Withstanding voltage: 1000V DC or AC peak
 Current rating: 1.0A
 Contact resistance: 20mOhm
 Insulation resistance: 5000MOhm at 100V

60 pol. connectors
upon request

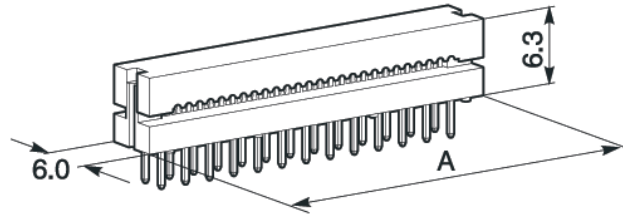

No. of Contacts	10	14	16	20	26	34	40	50
A [mm]	17.6	22.6	25.2	30.3	37.9	48.0	55.7	68.4

SPTCxx-4000

not used
 not used
 Pin length: 0 (Standard)
 0 = 3.2mm (Standard)
 1 = 4.2mm
 Requirement level: 4 = Tin plated (Standard)
 No. of contacts

