


更改 REV	出图日期 DATE	设计内容 MODIFICATION	? DRAWN
	2010/08/02		

SPECIFICATIONS

1. ELECTRICAL:
 UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
 INSULATION RESISTANCE: 100 M Ω.
 TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2. MECHANICAL:
 CABLE-TO-PLUG TENSILE STRENGTH: 20 POUND MIN.
 DURABILITY: 200 MATING CYCLES.

3. MATERIAL & FINISH:
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 CONTACT BLADE: COPPER ALLOY.
 CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.
 GOLD PLATING: 3u"-50u" ARE AVAILABLE.
 SHIELDED SHELL: COPPER ALLOY.

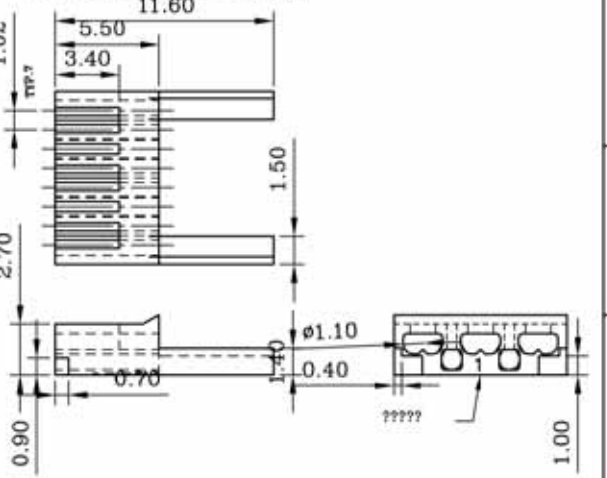

BLADE:	Z			
Drawing		CABLE TYPE	ROUND	
Mark		Mark	✓	
GOLD PLATING				50u"
Mark				✓



AE			
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL PC	DWG. NO. TD168A
.X±0.20	.X°±5°	TITLE	
.XX±0.10	.XX°±2°	TITLE	
APPROVAL 沈红波	CHECKED 钟均江	DRAWN LiJing	SCALE 5/2
			SHEET 1/1
			REV. A