



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2017/10/27	

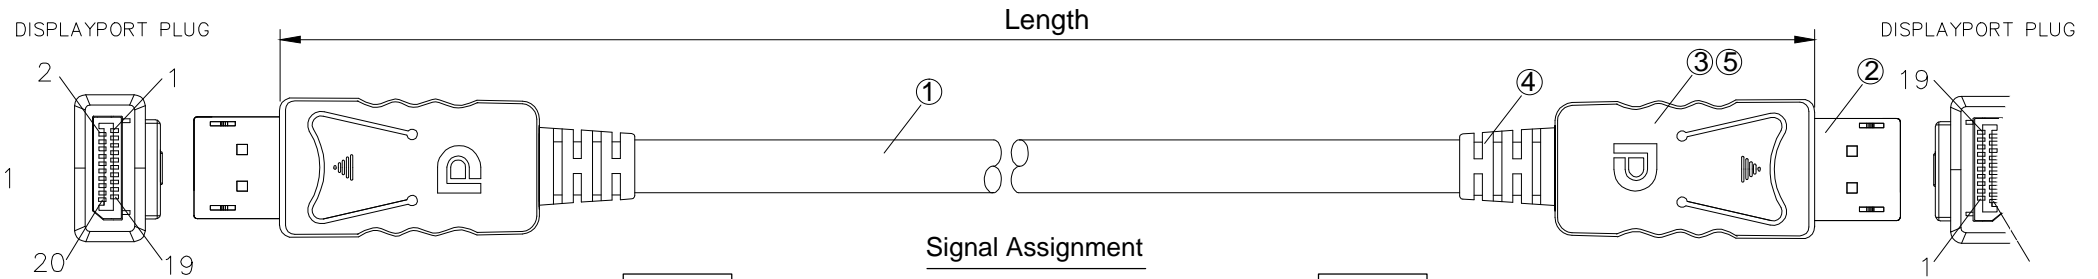

**Signal Assignment**

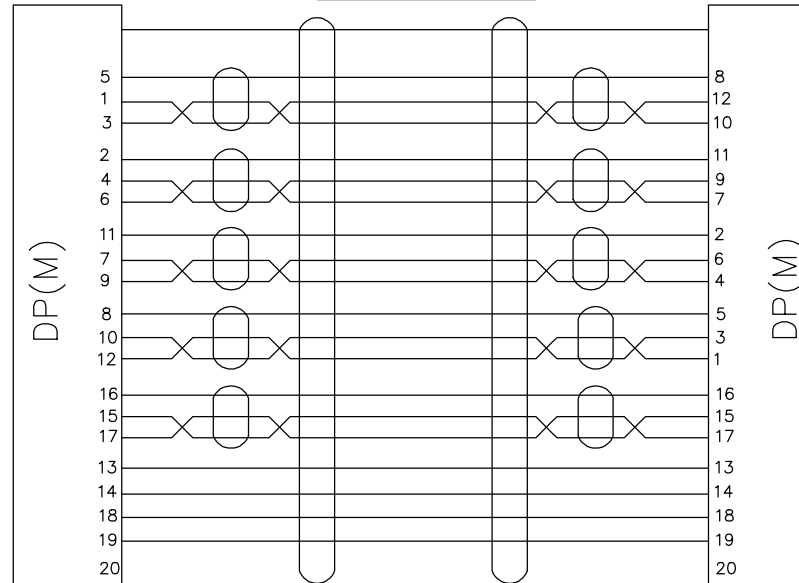

Item NO.	Length(m)
AK3975	0.5m
AK3976	1.0m
AK3983	2.0m

**Remark:**

1. 100% Open/Short Test
2. Conductive Resistance:5ohms MAX
3. Insulation Resistance:10M ohm MIN.
4. HI-POT:DC 300V/10MS.
5. The product is RoHS compliant.
6. Support 4K\*2K@60Hz.

⑤	Shell	ABS, DP(M) Shell	2Sets	
④	SR	60P PVC, Black	2PCS	
③	Internal Mold	Inner Mould PE	2PCS	
②	Connector	DP PLUG PIN, Gold-Plated	2PCS	
①	Cable	(1Px30AWG +D+AL)x5p+5Cx30AWG+ML+AL+D +B; OD7.2mm PVC,Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

TOLERANCES UNLESS OTHERWISE STATED	
X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

<b>ACT</b>			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		Dp to Dp Cable	
APPROVAL		CHECKED	DATE
			2017/10/27
		DRAWN	