
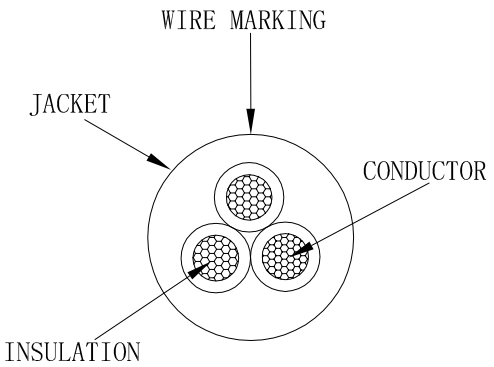


1	2
CUSTOMER NAME	
CUSTOMER Part No.	AK5072

7	8	9	10
DATE	REV	DESCRIPTION	BY
2015.06.01	A/1	NEW	Maxwell Yuan

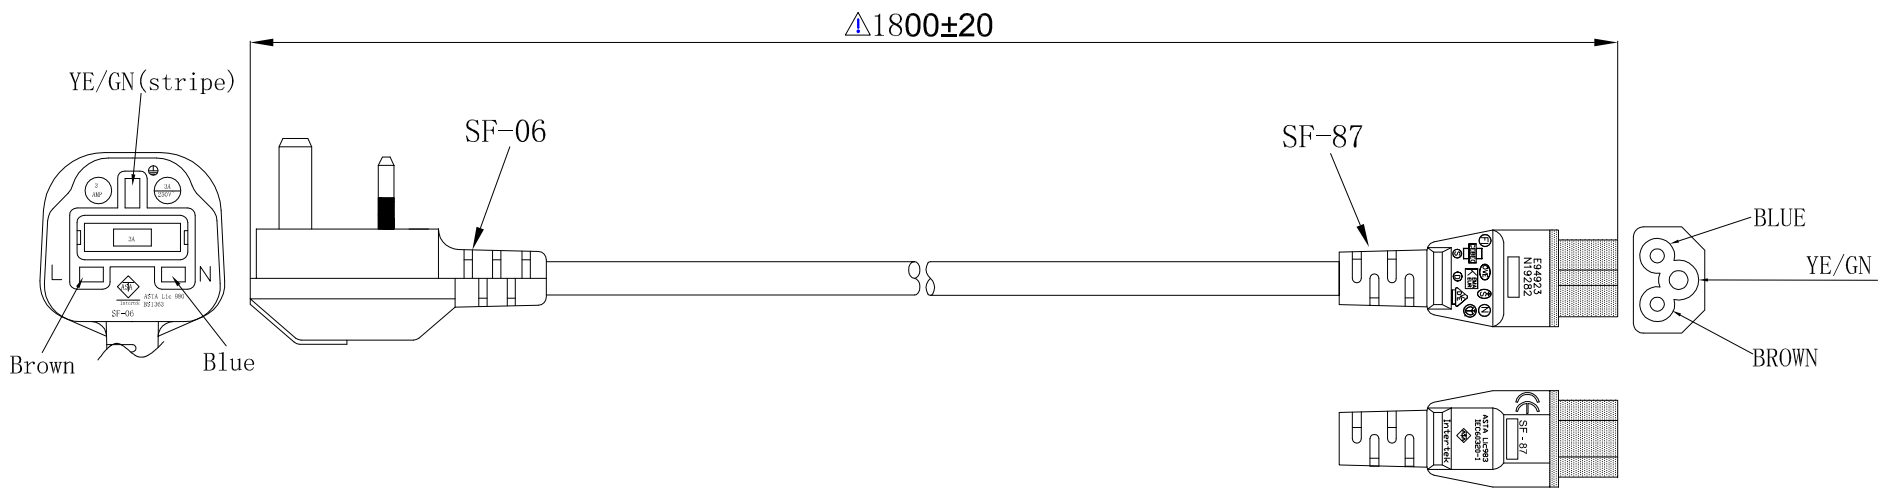

REMARKS:

1. PLUG (SF-06) RATED POWER:250V 3A, FUSE: 3A
2. CONNECTOR (SF-87) RATED POWER:250V 2.5A
3. WIRE:H05VV-F 3G0.75MM²
RATED VOLTAGE:300/500V
4. COLOR:BLACK
5. DVW TEST:2000VAC, 1S
6. POLARIZATION AND CONTINUITY TEST

WIRE MARKING: (Hollow) NO. 129		+ S S S KEMA-KEUR OVE S N D F Δ CEBEC 972 <VDE> NF-USE 1345 IEMMEQU H05VV-F 3G0.75MM ² V-75 300/500V ORDINARY DUTY N SW17436							
Key Size	△	3RD							
Length (mm)	Tolerance								
	Critical	Normal	General	±1.0	Part No.	AK5072			
0-15	±0.05	±0.10	±1.0		Description	SF-06+SF-87 H05VV-F 3G0.75MM ² BLACK			
15-60	±0.10	±0.20	±1.5		UNIT	mm	APPROVAL	CHECKER	DRAWER
60-150	±0.15	±0.35	±1.5		PAGE	1/1			
150-350	±0.20	±0.50	±2.0		Draw.No.				
350-1000	±0.40	±0.65	±2.0						