



Pitch (mm)	1,27
No of contacts	20
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Rated current	1,0 A
Rated voltage	100 V <sub>RMS</sub> / V <sub>DC</sub>
Withstand voltage	600 V <sub>RMS</sub> for 1 minute
Operating temperature	-40°C to +85°C
Max. processing temper.	260°C for 10 seconds
Packaging	Tube
A	15,56
B	15,56
C	5,08
D	5,08
E	18,20

PLCC sockets, solder tail, with precision stamped contacts (acc. JEDEC MO-047 / MO-052). Excellent component retention due to positive spring action of the contacts.

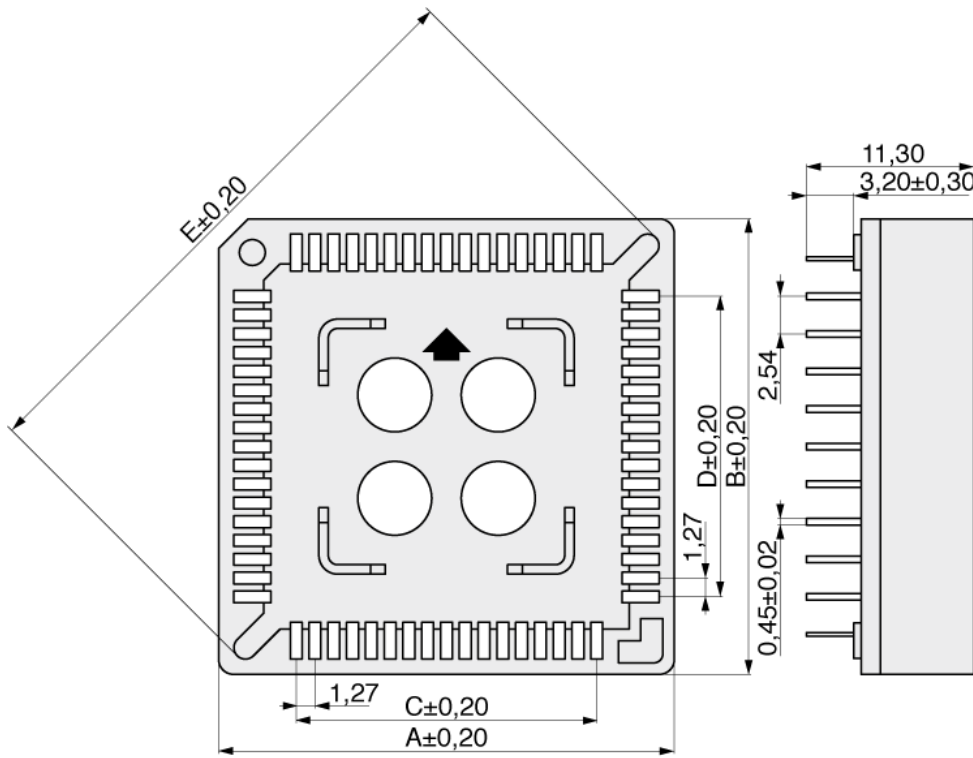

Footprint:

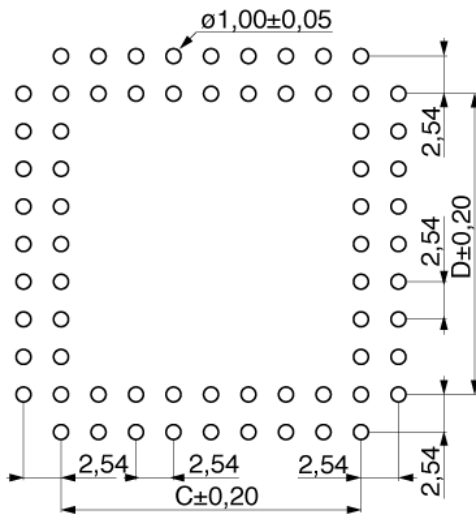

Date: 18.04.2011

Order code: 081-1-020-0-XT0



MPE Garry GmbH  
Schäfflerstraße 13  
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0  
Fax: +49 (0) 83 62 / 91 56-500  
Email: [vk@mpe-connector.de](mailto:vk@mpe-connector.de)

Internet: [http://www.mpe-connector.de/index.php?lang=en&menu=4&s\\_product=081-1-020-0-XT0](http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=081-1-020-0-XT0)