



KGS-0840



Industrial 8-Port L2 Gigabit Ethernet Switch

Panel Mounting Bracket
KSD-8PB



Key Features:

- Provides 8 10/100/1000Mbps copper ports
- Auto-negotiation
- Auto MDI/MDI-X crossover function
- Supports IEEE 802.3x flow control for full duplex
- Supports back pressure flow control for half duplex
- Fully non-blocking Gigabit full wire speed switching performance
- Jumbo frame support
- Alarm relay output for power failure event and configured port link fault events
- Wide operating temperature range
- Supports Green Ethernet power saving
- Supports IEEE 802.3az Energy Efficient Ethernet
- Supports DIN-Rail mounting and panel mounting
- Industrial-rated emission and immunity performance

Specifications:

Standard	IEEE 802.3, 802.3u, 802.3ab, 802.3x, 802.3az
Network Ports	8 10/100/1000Mbps copper ports
Copper Ports	Shielded RJ-45, 10BASE-T, 100BASE-TX, 1000BASE-T compliant Auto-negotiation, auto-MDI/MDI-X support
Network Cables	Cat.5, 5e UTP or higher up to 100 meters
MAC Addresses	8K
Jumbo Frame Length	Up to 9.6K bytes
Packet Buffer Size	4M bits
LED Indication	Unit: Power, Alarm status Per copper port: 1G/Link/Activity, 10-100/Link/Activity
DC Power Input	Screwed terminal block: DC+/ DC- contacts Working voltage range: +8 ~ +57VDC Polarity reversal protection
Relay Output	Screwed terminal block: 3 dry contacts for NC & NO pairs Contact rating: 30VDC/1A or 120VAC/0.5A Alarm events: power failure, configured port link fault
DIP Setting SW	SW1 – SW8: Port link fault relay alarm per port configuration SW9: Flow control
Power Consumption	10W max.



EMI EMS Safety Environmental Tests:

Test	Standard	Specifications
FCC/EMI	FCC Rule Part 15	Class A
CE/EMC/EMI	EN 61000-6-4	Class A
CE/EMC/EMS	EN 61000-6-2	
ESD Test	IEC 61000-4-2	Contact: +/-6KV Air: +/-8KV
RS Test	IEC 61000-4-3	Strength: 10V/m
EFT/BURST	IEC 61000-4-4	DC IN: 2KV Signal: 1KV
Surge Immunity	IEC 61000-4-5	DC IN: 0.5KV Signal: 0.5KV
CS Test	IEC 61000-4-6	Level 3
Magnetic Field Imm.	IEC 61000-4-8	50Hz 30A/m
Safety	EN 60950-1	
Dielectric Voltage	IEEE 802.3	TP, 1500VAC/60sec.
Insulation Resistance	IEEE 802.3	TP, 500VDC/10Mohm
Cold Test	IEC 68-2-1 Test Ad	-40°C, 48hrs
Dry Heat Test	IEC 68-2-2 Test Bd	+75°C 30%RH 48hrs
Damp Heat Test	IEC 68-2-3	+75°C 95%RH 48hrs
Storage Test	IEC 68-2-48	-40°C 96hrs +85°C 95%RH 96hrs
Vibration Test	IEC 68-2-64	10-200Hz, 1g 200-500Hz, 0.3g
Shock test	IEC 68-2-27	50G
NEMA TS2 Vibration test	NEMA TS2-2003 Proc. 2.2.8	5-30Hz, 0.5g xYZ, 1hr/axis
NEMA TS2 Environment test	NEMA TS2-2003 Proc. 2.2.7	Temp: -34-74°C Humid: 0%-90%

Housing	Enclosed metal with no fan
Environment	Operating Temperature: -30°C ~ +70°C Storage Temperature: -40°C ~ +85°C Relative Humidity: 5% ~ 90% non-condensing
Dimension	42 x 106 x 140 mm (WxDxH)
Mounting Support	DIN-Rail mounting, panel mounting (Optional)
Approval	FCC Class A, VCCI Class A, CE mark Class A, IEC 60950-1 safety EN 61000-6-4 emission, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2 Immunity for industrial environment, IEC 60068-2-64 Vibration, IEC 60068-2-27 shock test NEMA TS2 environment
MTBF	440K hours min.



FCC Part 15, Class A
CISPR 22 Class A


Katron Technologies Inc.

15F-7, No. 79, Sec. 1, Hsin Tai Wu Rd.,
Hsi-chih District, New Taipei City, Taiwan
Tel: 886-2-2698-3878
Fax: 886-2-2698-3873
E-mail: kti@ktinet.com.tw
URL: http://www.ktinet.com.tw


KTI Networks Inc.

10415-A Westpark Drive, Houston,
TX 77042. U.S.A.
Tel: 1-713-266-3891
Fax: 1-713-914-0555
E-mail: contact@ktinet.com
URL: http://www.ktinet.com

Trademarks: All brand names are trademarks or registered trademarks of their respective holders.
This information is subject to change without prior notice.

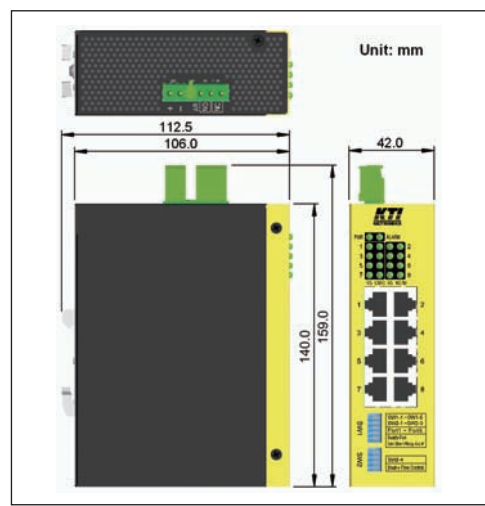

DIN-Rail Dimension

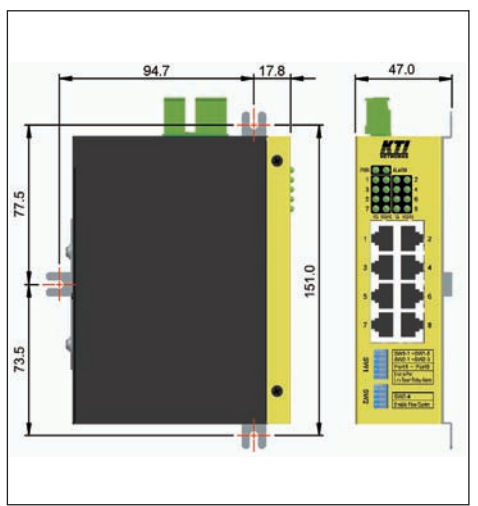

Panel Dimension