


Pitch (mm)	1,27
Cable termination	IDC
No of contacts	4
Polarising	Yes
Material contact	Phosphor bronze
Material insulator	Thermoplast UL94V-0
Rated current	1,5 A
Rated voltage	230 V <sub>RMS</sub> / V <sub>DC</sub>
Withstand voltage	1000 V <sub>RMS</sub> for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	230°C for 5 seconds
Packaging	Tube
A	8,45
B	3,81

High density transmission connectors. These parts are compatible with industries standard products. Recommended cable: AWG 28 flat ribbon cable with 1,27 mm centerline.

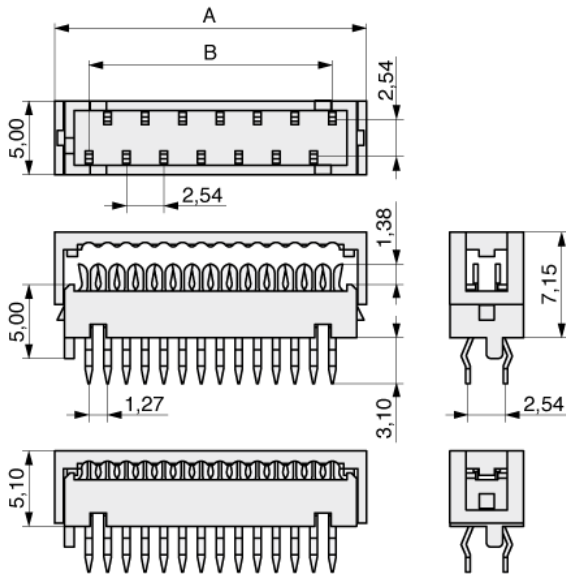

Date: 18.04.2011

Order code: 371-1-004-T-KT0



MPE Garry GmbH  
Schäfflerstraße 13  
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0  
Fax: +49 (0) 83 62 / 91 56-500  
Email: [vk@mpe-connector.de](mailto:vk@mpe-connector.de)

Internet: [http://www.mpe-connector.de/index.php?lang=en&menu=4&s\\_product=371-1-004-T-KT0](http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=371-1-004-T-KT0)