



Pitch (mm)	2,54
Mating contact size	? 0,64
No of contacts	2
Polarising	Yes
Locking	Friction lock
Material contact	Copper alloy
Plating contact	Sn
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for 1 minute
Operating temperature	-25°C to +105°C
Max. processing temper.	240°C for 5 seconds
Packaging	Standard
A	5,08
B	2,54

Special Pinheaders for use with series 431 (BLC1-1290).

Straight (vertical) version.

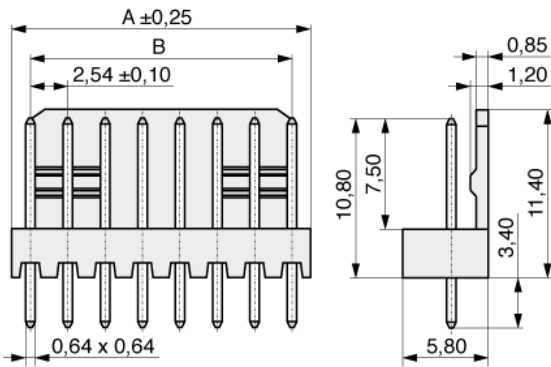

Footprint



Date: 18.04.2011

Order code: 428-1-002-0-T-KS0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=428-1-002-0-T-KS0