


Pitch (mm)	2,54
Mating pin size (range)	? 0,64
Cable termination	? 0,64
No of contacts	Crimp
Polarising	2
Locking	Yes
Material contact	Friction lock
Material insulator	Copper alloy
Rated current	Thermoplast UL94V-0
Rated voltage	3,0 A
Withstand voltage	250 V _{RMS} / V _{Dc}
Operating temperature	1000 V _{RMS} for 1 minute
Packaging	-25°C to +105°C
A	Standard

Crimphousings with a 2,54 mm pitch with polarisation feature. Compatible with industries standard.

Contacts are not included.

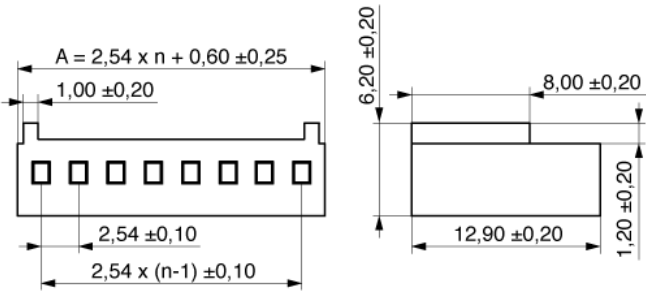

Date: 18.04.2011

Order code: 431-1-002-X-KS0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=431-1-002-X-KS0