


Pitch (mm)	2,54
Mating pin size (range)	? 0,64
Cable termination	Crimp
No of contacts	6
Polarising	No
Locking	No
Material contact	Copper alloy
Material insulator	Thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	250 V _{RMS} / V _{DC}
Withstand voltage	600 V _{RMS} for 1 minute
Operating temperature	-25°C to +105°C
Packaging	Standard

Crimphousings with a 2,54 mm pitch. Compatible with industries standard.
Contacts are not included.

Double row with polarization.

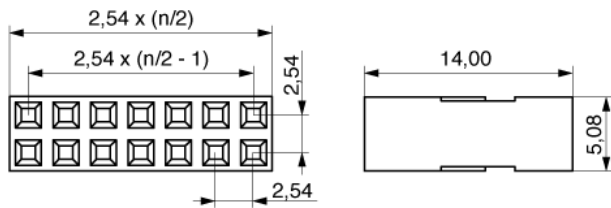

Date: 18.04.2011

Order code: 430-2-006-X-KS0



MPE Garry GmbH
 Schäfflerstraße 13
 87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
 Fax: +49 (0) 83 62 / 91 56-500
 Email: vk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=430-2-006-X-KS0