



Side:A

Side:B

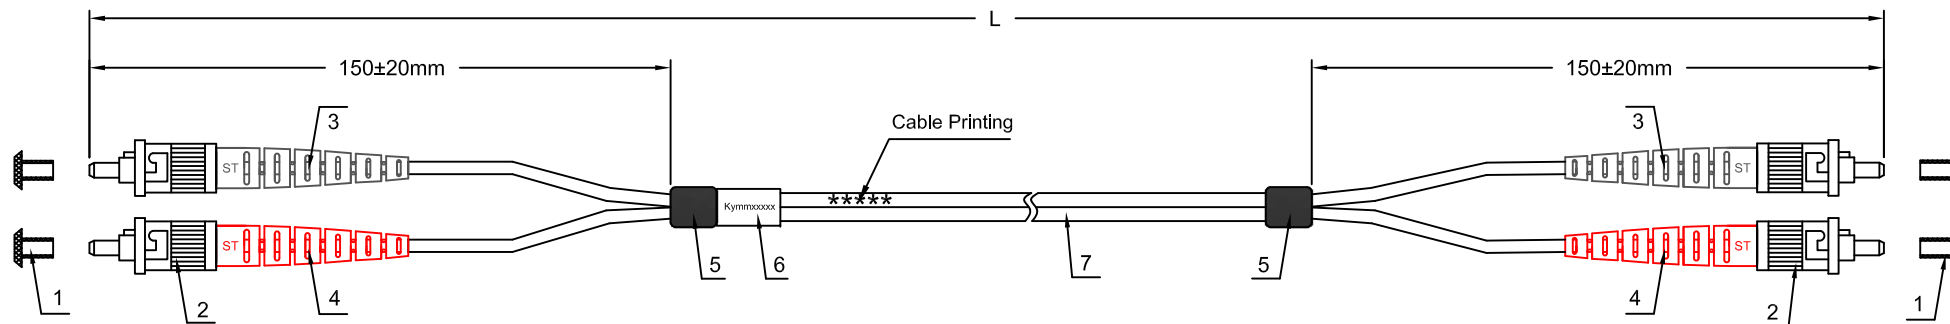


PACKING:


ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TEST CARD	SEE "DETAIL B"



DETAIL B
y: Year; mm: Month
xxxx: Serial Number


ASSEMBLY CONNECTIVITY	
Side:A- ST/UPC	Side:B- ST/UPC
A	B
B	A

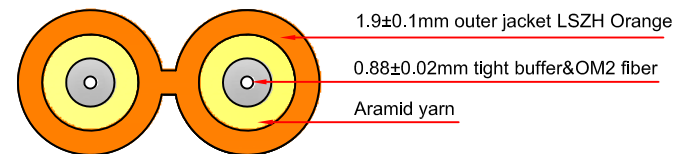




RL1501

ST/UPC-ST/UPC duplex patchcord OM2 1M

IIC: 04015001-P0015774



ACT is a registered trademark. All mentioned brand names are registered trademarks of their respective owners. Rights to the registered Names / Logos / Trademarks / Brands / Service Marks featured are property of and belong to their respective owners. Developed and styled in Europe, made in China. Misprints and errors reserved. ACT cannot be held liable or responsible for inaccurately presented content. ACT, Koothovenstraat 1E, 3772 MT Barneveld, The Netherlands.
We advice to clean all the connector ferrules for optimal performance
You can find safety information at www.act-connectivity.com/safety
www.act-connectivity.com





DETAIL C

RoHS
Complaint

Partnumber	Length	Tolerance	Partnumber	Length	Tolerance
RL1500	0.5M	0/+100mm	RL1510	10M	0/+100mm
RL1501	1M	0/+100mm	RL1515	15M	0/+100mm
RL1551	1.5M	0/+100mm	RL1520	20M	0/+100mm
RL1502	2M	0/+100mm	RL1530	30M	0/+150mm
RL1503	3M	0/+100mm	RL1550	50M	0/+250mm
RL1505	5M	0/+100mm			

ST/UPC --- ST/UPC duplex (1.9±0.1)*(4.0±0.2)mm OM2 LSZH Orange		
ITEM	Description	Q'TY
1	ST dust cover lucency	2 PCS
2	ST/UPC MM Simplex connector	2 PCS
3	ST boot Black	2 PCS
4	ST boot Red	1 PC
5	Breakout heat-shrink tube black L=15mm	2 PCS
6	Cable lable	1 PC
7	OD=(1.9±0.1)*(4.0±0.2)mm duplex OM2 fiber optical cable LSZH Orange	1 PC

			
Designed by:		Audit:	
Date:	2021-06-25	Approve:	
Unit:	mm	Sheet:	A4
Drawing NO:	RL15xx ST/UPC-ST/UPC duplex patchcord OM2-V1		

Product Specification

Standard Compliances

1. ANSI/TIA-568.3-D.
2. ISO 11801 OM1 /IEC60793-2-10 type A1a.
3. Telcordia GR-326-CORE Issue 4 February 2010 Compliance.
4. RoHS Compliance for the Requirement of European Union Issued Directive 2011/6S/EU.

Construction&Characteristics

Optical Performance	Insertion loss typical	0.15dB
	Insertion loss maximum	0.25dB
	Return loss	≥30dB
	Polish	UPC
Connector	Connector A side	IEC61754-2 ST connector
	Connector B side	IEC61754-2 ST connector
	Ferrule	Ceramic Zirconia (ZrO ₂)
Cable	Fiber class	OM2
	Fiber type	Multimode 50/125
	Cable type	(1.9±0.1)*(4.0±0.2)mm LSZH Orange
	Tensile strength	200N (short time 400N)
	Operation temp.	-20 °C to +80 °C (5 cycles)
	Vibration	10 to 55 Hz 15mm double amplitude
Marking	ACT Premium Multimode Fiber Optic Patch cable 50/125µm,OM2,LSZH xxxxM	

100% tested and approved

1. ACT advises to clean every connector ferrule before usage to get optimal performance.
2. Always leave the dust caps on if the cable isn't installed.