
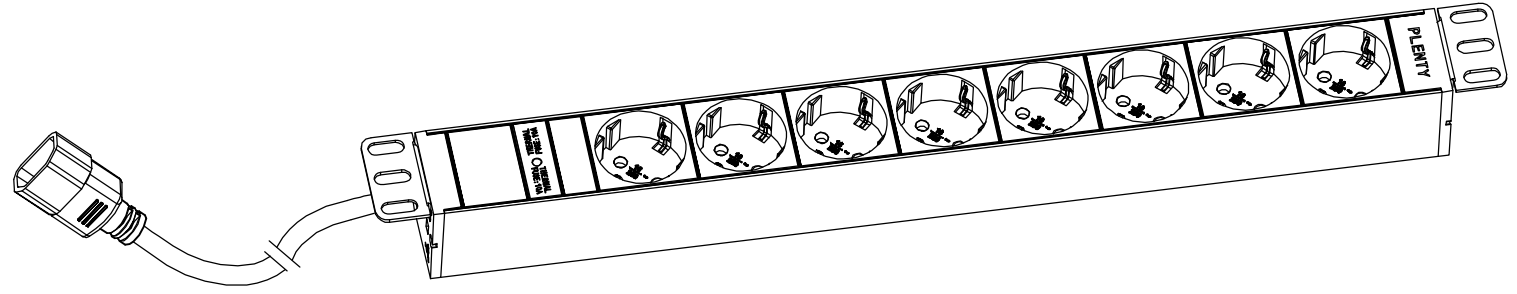




1 2 3 4 5 6 7 8

RoHS Compliant

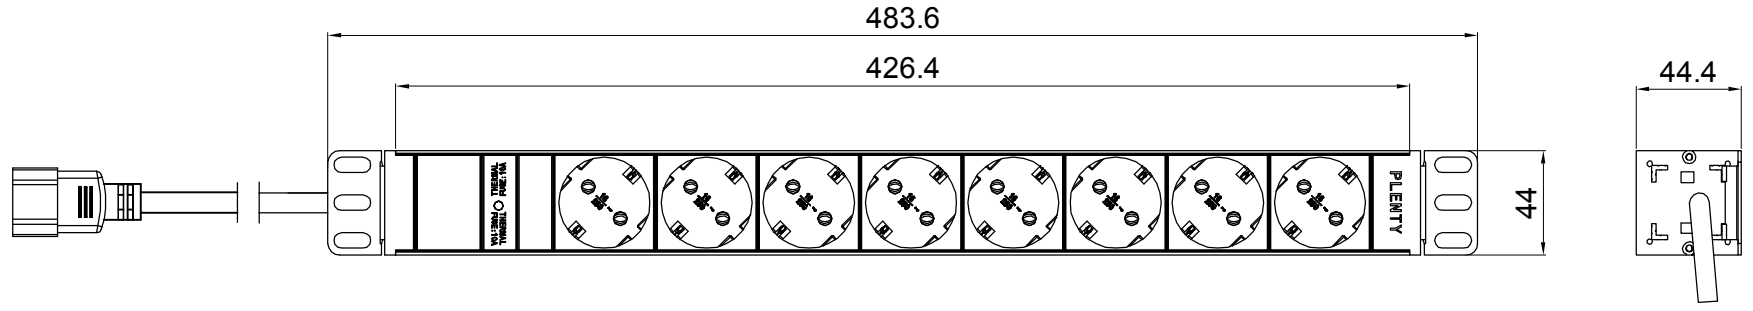

|  |   |   |
|--|---|---|
| <p><b>Basic Series</b></p>   | <p><b>OUTPUT</b></p> <p>(6) Schuko Socket Red Color RAL3000 (16A Rated)</p> | <p><b>OPERATING TEMPERATURE</b></p> <p>0° to 60°C</p>   |
| <p><b>INPUT</b></p> <p>250VAC 10A 50HZ<br/>C14 plug<br/>3M H05VV-F3G1.0mm Power lead</p> | <p><b>BRANCH CIRCUITS</b></p> <p>(1) SANG MAO Thermal Fuse 10A</p>          | <p><b>MOUNTING ACCESORIES</b></p> <p>(2) 41 Bracket</p> |

| Revisions |             |      |
|-----------|-------------|------|
| Rev       | Description | Date |
|           |             |      |

|  |  |                  |  |
|--|--|------------------|--|
| DRAWING TYPE   |  | RN3004           |  |
| <br><small>(NO PERMISSION, NO CHANGING)</small> |  | Aluminium        |  |
| <b>unit=mm</b>   |  | Silver Oxidation |  |
| <b>TECHNICAL STANDARD</b><br>1.IT11;<br>2.NO RUSTNESS<br>3.NO FLAW ON THE SURFACE  |  | Housing          |  |
| <b>FILLET</b> R0.5<br><b>ANGLE</b> ±0.5°   |  |                  |  |
| <b>FIRST ANGLE</b><br>                          |  | DATE 11-03-2015  |  |
| <b>SCALE</b> 1:3   |  |                  |  |

1 2 3 4 5 6 7 8