
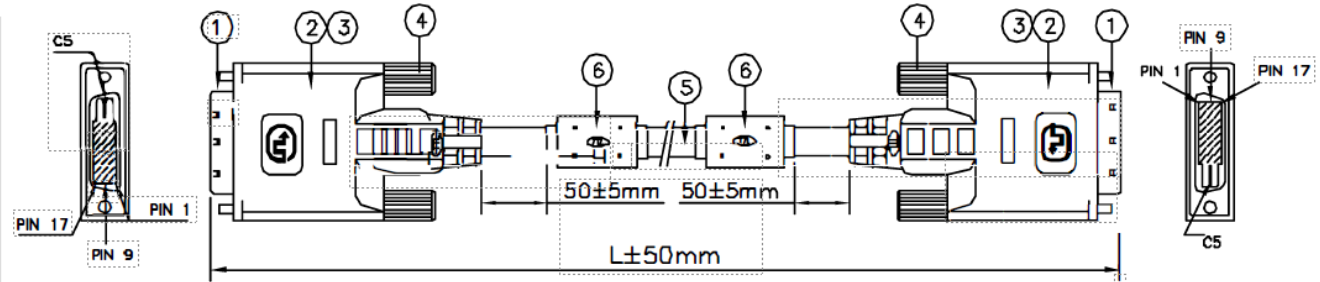


REV	DESCRIPTION	SIGNATURE	DATE
AO	ORIGIN	Flynn	2021. 12. 24

### PINOUT CONFIGURATION

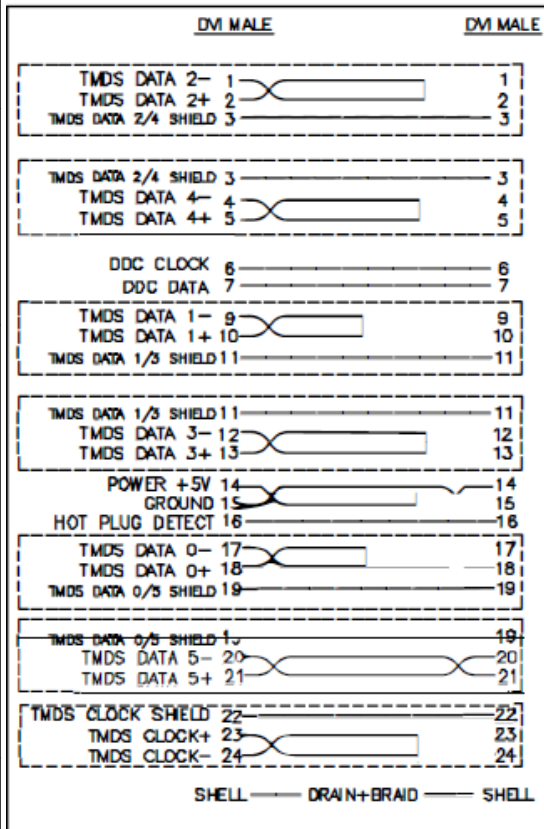

**NOTE:**

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK SHIELDING DESIGN.
2. WIRE MARKING:

E193793  $\mu$  AWM 20276 80°C 30V VW-1  
DVI DUAL LINK DIGITAL

Customer's P/N	L (mm)
AK3630	2000
AK3631	3000
AK3632	5000
AK3634	10000

ITEM	DESCRIPTION	QTY.	UNIT
1	DVI MALE CONNECTOR	2	PCS
2	LIGHT GRAY K239 COLOR MOLDED PVC HOOD	2	PCS
3	RF-BLOK	2	PCS
4	LIGHT GRAY K239 COLOR #4/40 THUMBSCREW	4	PCS
5	UL20276 (28AWG*1PAIR+AL-FOIL+DRAIN)*7C +(28AWG*1PAIR)*1C+(28AWG WIRE)*3C ;AL-FOIL/MY+DRAIN+85% BRAID OVERALL LIGHT GRAY K239 COLOR PVC JACKET	SEE	DWG
6	LIGHT GRAY K239 COLOR FERRITE CORE (17.5*28.5*10)	2	PCS

